

Sjöfartsstyrelsen

INFORMATIONSLAD NR 14/1.7.1996

RADIOUTRUSTNING PÅ FARTYG

Sjöfartsstyrelsen har den 17 juni 1996 ändrat sitt beslut av den 24 januari 1992 om tillämpning av 3 § förordningen om radioutrustning på fartyg (31/92). Ändringarna är i kraft fr.o.m. den 1 juli 1996.

Sjöfartsstyrelsens beslut av den 23 januari 1989 om likvärdiga arrangemang som ersätter radiotelegrafstation i fjärrtrafik och i Östersjö- och Nordsjötrafik samt i trafik på Irländska sjön är fortfarande i kraft. Besluten har publicerats i sjöfartsstyrelsens informationsblad nr 6/23.1.1989.

Radioutrustningen på fartyg skall uppfylla de krav som gäller det globala nöd- och säkerhetssystemet (GMDSS) senast den 1 februari 1999. Med hänvisning till internationella sjöfartsorganisationens (IMO) och dess radiounderkommitténs (COMSAR) rekommendationer anmodar sjöfartsstyrelsen rederierna att förse fartygen med radiokommunikationsutrustning som är förenlig med GMDSS-systemet i god tid före den 1 februari 1999, eftersom leverantörerna kan få svårigheter att leverera utrustningen mot slutet av övergångsperioden.

Bifogat publiceras förordningen om radioutrustning på fartyg (31/92) och sjöfartsstyrelsens beslut om tillämpning av förordningens 3 § i sin nu gällande form samt en översikt av GMDSS-systemets införande och tidtabell.

Heikki Valkonen
Chef för sjöfartsavdelningen
sjöfartsråd

Pekka Korhonen
Sjöfartsöverinspektör

Närmare upplysningar: Sjöfartsinspekionsbyrån

Detta informationsblad ersätter informationsblad: 3/1.2.1992 och
13/31.12.1992

Dnr 7/30/96
ISSN 1239-0976

Innehållsförteckning	Sida
Förordning om radioutrustning på fartyg (31/92)	3
Sjöfartsstyrelsens beslut om tillämpning av 3 § förordningen om radioutrustning på fartyg	5
Införande av GMDSS-systemet	13
GOC- och ROC-certifieringen i framtiden	16
Utbyte av det gamla GOC-certifikatet mot ett nytt	17
Vakthållning på kanal 16 efter 1.2.1999	17
Fiskefartyg	17
Nya radiojournaler	17
Skeppsmätning och tillämpning av dräktighetstalen efter 1.2.1999	18
Alarmlista (Muster list)	18
Falskt alarm från EPIRBer	18
Anskaffning av radartranspondrar (SART)	18
Radiomedical	18
Turku Radio	19
Elektromagnetiska störningar orsakade av radioutrustningen ombord	19
DSC-utrustningens kompatibilitet med befintlig utrustning	20
Kommande händelser och förändringar föreskrivna i SOLAS-konventionens IV och V kap.	20
Testning av GMDSS-systemets DSC-utrustning	21

- Bilaga 1 Formulär för utbyte av det gamla GOC-certifikatet mot ett nytt
- Bilaga 2 IMO Resolution A.813(19) (General Requirements for Electromagnetic
Compatibility (EMC) for All Electrical and Electronic Ship's Equipment
- Bilaga 3 Det Norske Veritas olycksfallsmeddelande nr 4/94
- Bilaga 4 Ursprunglig text SOLAS Conf.3/46 (Kommande händelser och förändringar
reglerade av SOLAS-konventionens IV och V kap.)
- Bilaga 5 COM/Circ.106 (Testing of MF Digital Selective Calling Equipment Installed for
Distress and Safety by Ships and Coast Stations)
- Bilaga 6 Anvisningar för testning av MF/DSC-utrustning
- Bilaga 7 COM/Circ.127 (Guidelines for Avoiding False Distress Alerts)
- Bilaga 8 Förteckning över sjöradionumren till vissa kustradiostationer som passar frekvensen
2187,5
- Bilaga 9 Finländska fartygs sjöradionummer 18.6.1996
(Förteckningen omfattar fartyg för vilka sjöradionummer reserverats fastän de
saknar DSC-utrustning)

**FÖRORDNING
OM RADIOUTRUSTNING PÅ FARTYG (17.1.1992/31)**

Given i Helsingfors den 17 januari 1992

På föredragning av trafikministern stadgas med stöd av 8 § 2 mom. sjölagen av den 9 juni 1939 (167/399), sådant det lyder i lag av den 26 maj 1967 (237/67):

1 §

Ett i Finland registrerat handelsfartyg skall förses med radioutrustning enligt vad som stadgas nedan.

Radioutrustningen skall vara typgodkänd eller godkänd av Teleförvalningscentralen enligt vad som stadgas i radiolagen (517/88) och radioförordningen (821/88).

2 §

Radioutrustningen på ett passagerarfartyg i internationell trafik och på ett lastfartyg i internationell trafik vars bruttodräktighetstal är minst 300 skall motsvara föreskrifterna om radioutrustning i den internationella konventionen om säkerhet för människoliv till sjöss (FördrS 11/81) jämte ändringar.

Sjöfartsstyrelsen kan på ansökan efter att ha hört Teleförvalningscentralen helt eller delvis bevilja dispens från skyldigheten att på fartyget ha i 1 mom. nämnd radioutrustning.

3 §

Radioutrustningen på ett lastfartyg i internationell trafik vars bruttodräktighet är under 300 samt på ett fartyg i inrikestrafik skall i tillämpliga delar uppfylla kraven i det globala nöd- och säkerhetssystemet (GMDSS). Sjöfartsstyrelsen meddelar närmare föreskrifter om radioutrustningen på sådana fartyg med hänsyn till trafikens art och fartygets trafikområde.

4 §

Om fartyget har byggts eller byggs före den 18 juli 1994, kan sjöfartsstyrelsen på redarens begäran tillåta att en dräktighet som fastställts enligt konventionen om ett enhetligt skeppsmätningssystem (FördrS 18/55) räknas som fartygets bruttodräktighet.

5 §

Teleförvalningscentralen inspekterar och övervakar radioutrustningen på handelsfartyg samt deras funktionsduglighet genom besiktning.

Sjöfartsstyrelsen övervakar att denna förordning iakttas och meddelar närmare föreskrifter om dess tillämpning.

6 §

Denna förordning träder i kraft den 1 februari 1992.

Genom denna förordning upphävs förordningen den 13 maj 1966 om fartygs radiostationer (279/66) jämte senare ändringar.

Innehåll: Radioutrustning på lastfartyg i internationell trafik villkas
bruttodräktighet understiger 300 samt på fartyg i inrikestrafik

**Normgivnings-
bemyndigande:** Förordning om radioutrustning på fartyg 17.1.1992 (31/92) 3 och 5 §§

Målgrupper: Tillsynsmyndigheter, rederier och leverantörer av radioutrustning

Giltighetstid: 1.2.1992 - tills vidare

Ändringar: 1 § och avsnitten Obligatoriska fartygsdokument och Tidtabell i bilaga I samt bilaga II till 2 §
Dnr 7/30/96, 17.6.1996
Ändringarna träder i kraft 1.7.1996

SJÖFARTSSTYRELSENS BESLUT
OM TILLÄMPNING AV 3 § FÖRORDNINGEN OM RADIOUTRUSTNING PÅ FARTYG

Utfärdat i Helsingfors den 24 januari 1992

Sjöfartsstyrelsen har med stöd av 3 och 5 §§ förordningen den 17 januari 1992 om radioutrustning på fartyg (31/92) beslutat:

1 §. (Ändrad genom beslut 17.6.1996, Dnr 7/30/96) Ett lastfartyg i internationell trafik vars bruttodräktighet understiger 300 skall förses med radioutrustning enligt bilaga I. Utrustningen skall drivas, underhållas och besiktas enligt bestämmelserna i bilaga I.

2 §. Ett fartyg i inrikestrafik skall förses med radioutrustning enligt bilaga II. Utrustningen skall drivas, underhållas och besiktas enligt bestämmelserna i bilaga II. (Bilaga II ändrad genom beslut 17.6.1996, Dnr 7/30/96)

3 §. Sjöfartsstyrelsen kan på ansökan medge ett enskilt fartyg lättanader från kraven i 1 och 2 §§.

4 §. Detta beslut träder i kraft den 1 februari 1992.

Kyösti Vesterinen
Generaldirektör

Heikki Valkonen
Chef för sjöfartsavdelningen
sjöfartsråd

**SJÖFARTSSTYRESENS BESLUT OM TILLÄMPNING AV 3 § FÖRORDNINGEN
OM RADIOUTRUSTNING PÅ FARTYG 24.1.1992, Dnr 1/30/92**

BILAGA I

**LASTFARTYG I INTERNATIONELL TRAFIK VILKAS BRUTTODRÄKTIGHET
UNDERSTIGER 300**

Basutrustning

1. VHF-radiotelefon med DSC-funktion och separat DSC-vakthållning (kanal 70), kanal 16 och tillräckligt med kanaler för allmän trafik;
2. EPIRB 406 MHz eller 1.6 GHz *) **);
3. radartransponder (SART) **);
4. NAVTEX-mottagare om fartyget seglar i områden inom NAVTEX räckvidd. I andra områden måste varningarna kunna mottagas via INMARSAT EGC eller HF-NBDP;
5. två (2) bärbara VHF-radiotelefoner med minst kanal 16 och/eller 15 och 17, för användning i livbåtar eller räddningsflottar;
6. 2182 kHz:n vaktmottagare (WR) samt tvåljudssignal (TTG); samt
7. 9 GHz radar.

**) I sjöområde A1 alternativt VHF-EPIRB med inbyggd radartransponder. På finska sjödistrikt kan den tas i bruk när VHF/DSC-systemet är operativt.

*) Inte i sjöområde A4 (1.6 GHz).

Tilläggsutrustning enligt trafikområde

Sjöområde A1

Det räcker med ovan nämnda basutrustning. Krav på tvåljudssignal (TTG) ställs inte i sjöområde A1.

Sjöområde A2 (utöver basutrustningen)

MF-radiotelefon med DSC-funktion, särskild DSC-vakthållning (2187,5 kHz), frekvens 2182 kHz och tillräckligt med frekvenser för allmän trafik.

Sjöområde A3 (utöver basutrustningen)

ALTERNATIV A

- INMARSAT SES (minimikrav telextrafik) och
- MF-radiotelefon med DSC-funktion, särskild DSC-vakthållning (2187,5 kHz), frekvensen 2182 kHz och dessutom frekvensen 4125 kHz för trafik mellan fartyg och flygplan.

ALTERNATIV B

- MF/HF-radiotelefon med DSC-funktion, särskild DSC-vakthållning på 2187,5 kHz + 8414,5 kHz och tillika på någon av frekvenserna 4207,5, 6312, 12577 eller 16804,5 kHz (kan ske med scanner), frekvensen 2182 kHz och tillräckligt med frekvenser för allmän trafik.

Sjöområde A4 (utöver basutrustningen)

MF/HF-radiotelefon med DSC-funktion, särskild DSC-vakthållning 2187,5 kHz + 8414,5 kHz och tillika på någon av frekvenserna 4207,5, 6312, 12577 eller 16804,5 kHz (kan ske med scanner), frekvensen 2182 kHz och tillräckligt med frekvenser för allmän trafik.

Energikällor

Om fartygets huvudenergikälla blir utslagen skall följande utrustning kunna drivas av en annan energikälla i minst sex (6) timmars tid:

- VHF-radiotelefonen, dess DSC-funktion och vakthållning (DSC)
- MF-radiotelefonen, dess DSC-funktion och vakthållning (DSC)
- MF/HF-radiotelefonen, dess DSC-funktion och vakthållning (DSC) och
- INMARSAT-satellitterminalen SES.

Dessutom fram till 1.2.1999:

- MF/2182 kHz vakthållningen och tvåljudssignalen (TTG).

Energikällan skall vara installerad och placerad så, att ett fel (t.ex. i laddaren) inte gör den funktionsoduglig och att exempelvis en brand i maskinrummet inte förstör den.

Vakthållning

Till sjöss skall ständig vakt hållas på

- ovan nämnda DSC-frekvenser samt VHF-kanal 70
- INMARSAT-satellitterminalen (SES) och
- NAVTEX- eller INMARSAT EGC- eller HF-NBDP-mottagaren.

Till 1.2.1999 hålls vakt även på

- VHF-kanal 16 och
- MF-frekvens 2182 kHz.

Säkerställande av att utrustningen fungerar

Utrustningens funktion säkerställs

- genom att enskilda apparater dubblas eller
- genom landbaserat underhåll (serviceavtal).

Ett skriftligt meddelande om vilken metod som valts skall lämnas till sjöfartsstyrelsen.

Besiktningar

- Grundläggande besiktning (nya radiostationer)
- Periodisk besiktning
 - Fartyg som har ett giltigt serviceavtal kan fritas från periodiska besiktningar.
 - Övriga fartygs radiostationer besiktas med två års intervaller (± 3 mån.).

Obligatoriska fartygssdokument (ändrad genom beslut 17.6.1996, Dnr 7/30/96)

- Radiolicens
- Operatörscertifikat
- Radiojournal
- List of Call Signs etc (ITU List VIIA)
- List of Coast Stations (listan kommer att uppta uppgifter om GMDSS-kuststationer allt efter som administrationerna underrättar ITU om dem)
- List of Ship Stations
- Manual for Maritime Mobile etc. (blå bok)
- Efterspanings- och räddningsmanual för handelsflottan (MERSAR)
- 1988 års ändringar (GMDSS) i 1974 års SOLAS-konvention och
- List of Radiodetermination and Special Service Stations (gäller samtliga fartyg i internationell trafik)

Tidtabell (ändrad genom beslut 17.6.1996, Dnr 7/30/96)

Alla fartyg skall ha:

- MF-radiotelefon med tvåljudssignal (TTG) och 2182 kHz vaktmottagare
- EPIRB, NAVTEX (eller ersättande utrustning) och bärbara radiotelefoner för livbåtar och räddningsflottar (VHF)
- 9 GHz radar och SART
- MF/DSC-utrustning, MF/HF/DSC-utrustning eller INMARSAT SES, på fartyg som byggts 1.1.1996 eller senare innan de sätts i trafik, och på existerande fartyg senast 1.2.1999
- VHF/DSC-utrustning, på fartyg som byggts 1.1.1997 eller senare innan de sätts i trafik, och på existerande fartyg senast 1.2.1999.

**SJÖFARTSSTYRESENS BESLUT OM TILLÄMPNING AV 3 § FÖRORDNINGEN
OM RADIOUTRUSTNING PÅ FARTYG 24.1.1992, Dnr 1/30/92**

BILAGA II (ändrad genom beslut 17.6.1996, Dnr 7/30/96)

FARTYG I INRIKESTRAFIK

Trafikområde III

Basutrustning

1. VHF-radiotelefon med DSC-funktion, DSC-vakthållning (kanal 70), kanal 16 och tillräckligt med kanaler för allmän trafik;
2. VHF-EPIRB med inbyggd radartransponder (för att denna anordning skall kunna tas i drift måste det finnas ett fungerande VHF-DSC-system i de områden som fartyget trafikerar). VHF-EPIRBen kan ersättas antingen med en 406 MHz eller med en 1.6 GHz EPIRB samt med en SART; samt
3. två (2) bärbara VHF-radiotelefoner med minst kanal 16 och/eller 15 och 17 för användning i livbåtar eller räddningsflottar.

Vakthållning

Till sjöss skall ständig vakt hållas på VHF/DSC-kanal 70 och på VHF-kanal 16.

Energikällor

Om huvudenergikällan blir utslagen skall följande radioutrustning kunna drivas av en annan energikälla i minst två (2) timmars tid:

- VHF-radiotelefonen/dess DSC-funktion och vakthållning.

Energikällan skall vara installerad och placerad så, att ett fel (t.ex. i ladddaren) inte gör den funktionsduglig och att exempelvis en brand i maskinrummet inte förstör den.

Säkerställande av att utrustningen fungerar

Utrustningens funktionsduglighet säkerställs:

- genom att VHF-radiotelefonen eller EPIRBen dubblas eller
- genom landbaserat underhåll (serviceavtal).

Ett skriftligt meddelande om vilken metod som valts skall lämnas till sjöfartsstyrelsen.

Besiktningar

- Grundläggande besiktning (nya radiostationer)
- Periodisk besiktning
 - Fartyg som har ett giltigt serviceavtal kan fritas från periodiska besiktningar.
 - Övriga fartygs radiostationer besiktas med fyra (4) års intervaller (\pm 3 mån.).

Obligatoriska fartygssdokument

- Radiolicens
- Operatörscertifikat
- Radiojournal och
- Fyrar vid Finlands kuster/radiodelen

Tidtabell

- Existerande fartyg skall förses med utrustning enligt bestämmelserna ovan senast 1.1.1997. De behöver emellertid inte uppfylla kravet på VHF/DSC förrän 1.2.1999.
- Nya fartyg som färdigställs 1.1.1997 eller senare skall förses med utrustning enligt ovan nämnda bestämmelser innan de sätts i trafik.

Trafikområde II

Basutrustning

1. VHF-radiotelefon med DSC-funktion, DSC-vakthållning (kanal 70), kanal 16 och tillräckligt med kanaler för allmän trafik; samt
2. två (2) bärbara VHF-radiotelefoner med minst kanal 16 och/eller 15 och 17 för användning i livbåtar eller räddningsflockar.

Vakthållning

Till sjöss skall ständig vakt hållas på VHF/DSC-kanal 70 och på VHF-kanal 16.

Energikällor

Om huvudenergikällan blir utslagen skall följande radiourtrustning kunna drivas av en annan energikälla i minst en (1) timmes tid:

- VHF-radiotelefonen/dess DSC-funktion och vakthållning.

Energikällan skall vara installerad och placerad så, att ett fel (t.ex. i laddaren) inte gör den funktionsoduglig och att exempelvis en brand i maskinrummet inte förstör den.

Säkerställande av att utrustningen fungerar

Utrustningens funktionsduglighet säkerställs

- genom att VHF-radiotelefonen dubbleras eller
- genom landbaserat underhåll (serviceavtal).

Ett skriftligt meddelande om vilken metod som valts skall lämnas till sjöfartsstyrelsen.

Besiktningar

- Grundläggande besiktning (nya radiostationer)

- Periodisk besiktning
 - Fartyg som har giltigt serviceavtal kan fritas från periodiska besiktningar
 - Övriga fartygs radiostationer besiktas med fyra (4) års intervaller (\pm 3 mån.).

Obligatoriska fartygssdokument

- Radiolicens
- Operatörscertifikat (ROC)
- Radiojournal och
- Fyrar vid Finlands kuster/radiodelen

Tidtabell

- Fartygen skall genast förses med VHF-radiotelefon samt med två bärbara VHF-radiotelefoner för användning i livbåtar/räddningsflottar senast 1.1.1997.
- Nya fartyg som färdigställs 1.1.1997 eller senare skall därtill förses med VHF/DSC-utrustning och DSC-vaktmottagare innan de sätts i trafik.
- Existerande fartyg skall förses med VHF/DSC-utrustning och DSC-vaktmottagare senast 1.2.1999.

Trafikområde I (tillämpas på fartyg vilkas i mätbrevet angivna längd överstiger 15 m, med undantag för obemannade pråmar)

Basutrustning

1. VHF-radiotelefon med kanal 16 och tillräckligt med kanaler för allmän trafik; samt
2. två (2) bärbara VHF-radiotelefoner med minst kanal 16 och/eller 15 och 17 för användning i livbåtar eller räddningsflottar (gäller enbart passagerarfartyg).

Vakthållning

Till sjöss skall ständig vakt hållas på kanal 16.

Energikällor

Om huvudenergikällan blir utslagen skall följande radioutrustning kunna drivas av en annan energikälla i minst en (1) timmes tid:

- VHF-radiotelefonen.

Energikällan skall vara installerad och placerad så, att ett fel (t.ex. i laddaren) inte gör den funktionsoduglig och att exempelvis en brand i maskinrummet inte förstör den.

Säkerställande av att utrustningen fungerar

Utrustningens funktionsduglighet säkerställs

- genom att VHF-radiotelefonen dubbleras eller
- genom landbaserat underhåll (serviceavtal).

Ett skriftligt meddelande om vilken metod som valts skall lämnas till sjöfartsstyrelsen.

Besiktningar

- Grundläggande besiktning (nya radiostationer)
- Periodisk besiktning
 - Fartyg som har ett giltigt serviceavtal kan fritas från periodiska besiktningar.
 - Övriga fartygs radiostationer besiktas med fyra (4) års intervaller (\pm 3 mån.).

Obligatoriska fartygssdokument

- Radiolicens
- Operatörscertifikat (VHF) och
- Radiojournal

Tidtabell

- Fartygen skall förses med VHF-radiotelfon senast 1.1.1997.
- Passagerarfartyg skall dessutom ha två bärbara VHF-radiotelefoner senast 1.1.1997.

INFÖRANDE AV GMDSS-SYSTEMET

I det följande ges en översikt av de begrepp som hänför sig till GMDSS-systemet, systemets införande och tidtabellen för det.

Sjöområden/radiosystem

Sjöområde A2 är ett område där DSC täcker medelfrekvensområdet i riktning fartyg-kustradiostation.

Sjöområde A1 är ett område som täcks av VHF-DSC i riktning fartyg-kustradiostation, då fartygets antennhöjd är 4 m. Enligt IMO:s kalkylationsschema är räckvidden då ca 30 sjömil, om jordantennens höjd är 100 m.

Anrop via DSC (Digital Selective Call) förmedlas i form av digitala skurar. Tal används först då DSC-kontakt har etablerats. Nöd- och säkerhetsfrekvensen på MF-DSC är 2187,5 kHz. Nödanrops- och säkerhetskanalen på VHF-DSC är 70 och den fungerar också som anropskanal. Vid nödanrop inom MF-frekvensområdet övergår man efter DSC-nödlarmet till talfrekvensen 2182 kHz. Efter DSC-nödlarmet vid nödanrop inom VHF-frekvensområdet inleds samtalet på kanal 16.

Tidtabell för DSC (Digital Selective Call)

MF-DSC: Sjöområde A2 inrättades 1.1.1993 och det täcker hela Östersjön.

VHF-DSC och sjöområde A1: Ett avtal om inrättande av sjöområde A1 (VHF/DSC) ingicks mellan sjöfartsstyrelsen och Telecom Finland Oy/radiotjänster 30.11.1994. Sjöområde A1 kommer att omfatta hela kusten och kommer att införas officiellt 1.1.1997. Enligt uppgift inrättar Sverige lokala A1-områden utanför Stockholm och i Norra Kvarken. A1-området utanför Stockholm blir färdigt mot slutet av 1996 och området i Norra Kvarken någon gång år 1997. Även Estland har kungjort sin vilja att bygga ut VHF- och VHF/DSC-system i framtiden.

De finska MF-DSC- och VHF-DSC-systemen kommer enligt planerna att endast erbjuda tjänster avseende nöd- och säkerhetskommunikation. Nödlarmen styrs direkt till närmaste sjöräddningscentral. Säkerhetskommunikationen kommer framöver att övertas av sjöfartsverkets egen radiostation (Turku Radio/Pärnäs).

Nödradio på Saimen: Sjöfartsverket har byggt ut ett VHF-nöd- och säkerhetsradiosystem i Saimenområdet. Vakthållningen är förlagd till Villmanstrand, Varkaus, Nyslott och Joensuu kretsalarmeringscentraler. De kanaler som passas är kanal 16 och 13. Det föreligger planer på att även inrätta jourer i Kuopio, Koli och Ristiina.

Nödradion på Saimen erbjuder endast tjänster avseende nöd- och säkerhetskommunikation. Nödlarmen styrs direkt till närmaste kretsalarmeringscentral.

Hur fartygen skall övergå till GMDSS-systemet (övergångsregeln i SOLAS)

Enligt det nya IV kapitlet i SOLAS-konventionen (FödrS 11/81) kan rederiet välja - att, oberoende av fartygets ålder, utrusta det enligt reglerna i SOLAS 1974-konventionen eller

- att utrusta fartyget så att det uppfyller alla GMDSS-krav.

Fr.o.m. 1.8.1993 har en satellit-EPIRB och en NAVTEX-mottagare varit obligatoriska för alla fartyg som rör sig i områden inom NAVTEX räckvidd.

Fartyg som byggs 1.2.1995 eller senare skall uppfylla alla GMDSS-krav.

Fr.o.m. 1.2.1995 har en 9 GHz (3 cm) radar och radartranspondrar varit obligatoriska på alla konventionsfartyg.

Senast 1.2.1999 skall alla fartyg uppfylla samtliga GMDSS-krav.

Fram till 1.2.1999 skall alla fartyg passa VHF-kanal 16 och MF-frekvensen 2182 kHz. Den senare frekvensen passas med hjälp av en separat vaktmottagare. Fartyg som byggs efter 1.2.1997 kan fritas från det senare kravet.

Tidtabell för verkställighet på finska fartyg

1. Passagerarfartygen i Östersjötrafik samt de passagerarfartyg i kryssningstrafik som seglar utom VHF-räckvidd har redan övergått till GMDSS. Fartyg som sätts i trafik inom detta trafikområde skall fylla de krav som gäller sjöområde A2.
2. Passagerarfartygen i trafik mellan Finland och Sverige eller i internationell trafik inom VHF-räckvidd i Finska viken skall utrustas som GMDSS-A1 fartyg före följande besiktning. I Kvarkenområdet skall fartyg som går i trafik på Sverige utrustas som GMDSS-A1 fartyg senast då ett lokalt sjöområde A1 inrättas på svenska sidan. Genom fältstyrkemätningar kommer man att ta reda på hur väl det finska sjöområdet A1 täcker Estlands kust. Om resultatet är tillräckligt positiv, fattas beslut om huruvida trafiken mellan dessa hamnar kan jämföras med trafik på sjöområde A1.
3. På passagerarfartyg som går i trafik på Finska viken eller på de baltiska länderna tillämpas kraven i punkt 2. De fartyg som rör sig utom VHF-räckvidd skall fylla de krav som gäller sjöområde A2.
4. Lastfartyg i internationell trafik vilkas bruttodräktighet är minst 1600 skall uppfylla kraven angående GMDSS-utrustning i respektive trafikområde.

För de fartyg som nämns i punkterna 1-4 kan redaren, om han så önskar, välja en radioutrustning enligt kraven i 1974 års SOLAS-konvention (nuvarande system + radiotelegrafist). Dessa fartyg skall dock senast 1.2.1999 förses med GMDSS-utrustning i likhet med de fartyg som nämns i punkt 5. Fartyg som byggs 1.2.1995 eller senare skall uppfylla GMDSS-kraven innan de sätts i trafik.

5. På lastfartyg i internationell trafik vilkas bruttodräktighet är minst 300 men under 1600 tillämpas tidtabellen i det nya IV kapitlet i SOLAS-konventionen. Sjöfartsstyrelsen rekommenderar att MF-DSC- och VHF-DSC-utrustning anskaffas till dessa fartyg så fort som möjligt.

6. Lastfartyg i internationell trafik vilkas bruttodräktighet understiger 300 skall ha en MF-sändare/mottagare jämte utrustning (ej DSC) samt tvåljudssignal och vaktmottagare på frekvensen 2182 kHz. För övrigt tillämpas tidtabellen och rekommendationen i punkt 5.
7. Special Purpose Ships. Dessa fartyg handläggs var för sig. Hänsyn bör emellertid tas till att Code of Safety for Special Purpose Ships förutsätter att dessa fartyg har (i tillämpliga delar) likadan radiourtrustning som lastfartyg skall ha enligt SOLAS).
8. Fartyg som seglar inom trafikområde III i inrikestrafik (inom VHF-räckvidd) skall senast 1.2.1997 utrustas med VHF-radiotelefon och annan utrustning enligt sjöfartsstyrelsens beslut om tillämpning av 3 § förordningen om radiourtrustning på fartyg. Dessa fartyg samt nya fartyg som färdigställs 1.1.1997 och senare skall därtill senast 1.2.1997 förses med GMDSS-utrustning för sjöområde A1 (VHF/DSC). Fartyg som färdigställs före 1.1.1997 skall förses med VHF/DSC-utrustning senast 1.2.1999.

Fartyg som seglar inom trafikområde II i inrikestrafik skall genast utrustas med VHF-radiotelefon samt senast 1.1.1997 med två bärbara VHF-radiotelefoner för användning i livbåtar/räddningsflottar. Nya fartyg som färdigställs 1.1.1997 och senare skall därtill förses med VHF/DSC-utrustning och DSC-vaktmottagare innan de sätts i trafik. Existerande fartyg skall förses med VHF/DSC-utrustning och DSC-vaktmottagare senast 1.2.1999.

Fr.o.m. 1.4.1996 har en VHF-radiotelefon varit obligatorisk för fartyg med en i mätbrevet angiven längd överstigande 15 m, med undantag för obemannade pråmar, som seglar inom trafikområde I i inrikestrafik. Fr.o.m. samma datum har därtill två bärbara VHF-ficktelefoner varit obligatoriska för passagerarfartyg. Ingen annan radiourtrustning är obligatorisk för dessa fartyg.

ANM. Kraven på radiokommunikationsutrustning för passagerarfartyg i inrikestrafik kan framöver bli strängare p.g.a. EU-direktiv.

9. Det finns inga särskilda krav på radiourtrustning för hyresbåtar. Hyresbåtar som företar resor till utlandet behandlas var för sig. Vad som nämns i punkt 10 gäller emellertid också hyresbåtarna.
10. Det finns inga särskilda krav på utrustning för nöjesfarkoster, utan utrustningen är i dag frivillig. Enligt planerna skall Turku Radio och sjöräddningscentralerna av hänsyn till sjösäkerheten fortsätta att passa kanal 16 också efter 1.2.1999. Sjöfartsstyrelsen rekommenderar dock att DSC-utrustning anskaffas även till nöjesfarkoster.

Radiopersonalens behörighet

1. Varje vaktgående styrman på passagerarfartygen i Östersjötrafik och på de passagerarfartyg i kryssningstrafik som rör sig utom VHF-räckvidd skall innehålla ett GOC-certifikat senast 1.1.1997. I åratals har det som villkor för dispens krävts att minst två medlemmar av däcksbefälet på dessa fartyg innehåller GOC-certifikat (General Operator's Certificate).

2. Alla vaktgående styrmän på passagerarfartyg i trafik mellan Finland och Sverige skall inneha GMDSS-certifikat senast 1.1.1997. Vaktgående styrmän som bara hanterar den utrustning som fordras på sjöområde A1 behöver endast ROC-certifikat (Restricted Operator's Certificate).
3. Kraven i punkt 2 gäller tills vidare också passagerarfartyg som går i trafik på Finska viken och på de baltiska länderna.
4. Alla vaktgående styrmän på lastfartyg som är konventionsfartyg och som går i internationell trafik skall inneha GOC-certifikat senast 1.1.1997.
5. En person i besättningen på lastfartyg i internationell trafik vilkas bruttodräktighet understiger 300 skall inneha GOC-certifikat senast 1.1.1997.
6. Special Purpose Ships. Kraven i punkterna 5 och 7 tillämpas på dessa fartyg, varvid separat beslut fattas för varje enskilt fartyg.
7. En person ombord på fartyg i inrikesfart, bemannade hyresbåtar och nöjesfarkoster skall inneha det certifikat som fartygets radioutrustning förutsätter.
8. Det tidigare allmänna radiotelefonistcertifikatet godkänns fortfarande för obemannade hyresbåtar och nöjesfarkoster (även de som utrustats med DSC).

Om befälhavaren går vakt, skall även han inneha GOC-certifikat eller, i förekommande fall, ROC-certifikat. Alla befälhavare skall inneha antingen GOC- resp. ROC-certifikat senast 1.2.1999.

Sjöfartsstyrelsen kan i enskilda fall tillåta undantag från behörighetskraven ovan.

GOC- OCH ROC-CERTIFIERINGEN I FRAMTIDEN

För erhållande av GOC-certifikat fordras genomgång av kurs och avläggande av examen. Certifikatet kan också erhållas enbart genom avläggande av examen.

GOC-certifikatets (General Operator's Certificate) giltighet kommer att kontrolleras med fem års intervaller. GOC-certifikatet förblir i kraft, om innehavaren har fullgjort minst ett års tjänstgöring på sjögående fartyg under den femårsperiod som föregår kontrollen. I annat fall krävs avläggande av repetitionsförhör eller kurs.

Ovan beskrivna praxis kommer också att gälla ROC-certifikat (Restricted Operator's Certificate).

UTBYTE AV DET GAMLA GOC-CERTIFIKATET MOT ETT NYTT

Det finländska GOC-certifikat som utfärdats före 31.10.1994 saknar hänvisning till GMDSS-systemet och till den europeiska rekommendation som givits om GOC-examen. På grund av dessa brister har myndigheterna i vissa länder begärt tilläggsutredningar. Teleförvalningscentralen har förnyat blanketten för GOC-certifikat. Ett GOC-certifikat av gammal modell som utfärdats före 31.10.1994 kan bytas ut mot ett nytt. Det nya certifikatet beviljas kostnadsfritt. Detta gäller inte certifikat som utfärdas för första gången. För dem uppbärs normal certifikatsavgift.

Certifikatet kan bytas ut genom återsändande av blanketten i bilaga 1 omsorgsfullt ifylld till Teleförvalningscentralen, Trafiksektionen/GOC, PB 53, 00211 Helsingfors. Ett officiellt passfotografi som inte är äldre än två år skall bifogas. De förnyade certifikaten skickas som vanlig brevförsändelse till den adress som uppgivits på ansökningsblanketten. Om utdelningsadressen inte är sökandens egen postadress, är det mycket viktigt att man också uppger vem adressen tillhör, t.ex. genom att använda beteckningen "c/o".

Det gamla GOC-certifikatet behöver inte återsändas till Teleförvalningscentralen utan innehavaren kan själv makulera det.

Innan certifikatet tas i bruk skall det förses med innehavarens namnteckning. Namnteckningen skall göras på därtill reserverad plats.

VAKTHÅLLNING PÅ KANAL 16 EFTER 1.2.1999

Vakthållningen på kanal 16 utmed hela kusten kommer att fortgå tills vidare även efter 1.2.1999. Sjöfartsstyrelsen rekommenderar dock att DSC-utrustning anskaffas till fritidsbåtar, eftersom det inte är säkert att vakthållningen fortsätter i samtliga områden efter 1.2.1999.

FISKEFARTYG

Fiskefartygs bemanning och konstruktion/utrustning (även radioutrustning) kommer att fastställas i samband med att EU-direktiven angående fiskefartyg sätts i kraft.

NYA RADIOJOURNALE

Nya radiojournaler tillhandahålls av Teleförvalningscentralens kundservice:

- telefon (90) 696 65 00
- telefax (90) 696 64 10

och av sjöfartsstyrelsens publikationsförsäljning:

- telefon (90) 180 82 14
- telefax (90) 180 83 55.

Ifyllnadsanvisningar finns i början av journalen. Specialfartyg, t.ex. isbrytare, skall dessutom lämna de tilläggsuppgifter som rederiet eller fartygets arbetsordning fordrar. Ny radiojournal skall tas i bruk på alla fartyg som har radioutrustning. Andra modeller för radiojournaler tillhandahålls inte i Finland.

SKEPPSMÄTNING OCH TILLÄMPNING AV DRÄKTIGHETSTAL EFTER 1.2.1999

Enligt 4 § förordningen om radioutrustning på fartyg (31/92) kan sjöfartsstyrelsen på redarens begäran tillåta att en dräktighet fastställd enligt konventionen om ett enhetligt skeppsmätningssystem (FödrS 18/55) används som bruttodräktighet för fartyg byggda före 18.7.1994. Denna praxis tillämpas fram till 31.1.1999.

Fr.o.m. 1.2.1999 skall alla fartyg i internationell trafik ha en dräktighet enligt 1969 års internationella skeppsmätningskonvention (FödrS 31/82). Då övergår man överallt till GMDSS/DSC-systemet och de nuvarande nödfrekvenserna passas antingen inte alls eller inte i samma utsträckning som i dag.

ALARMLISTA (MUSTER LIST)

De personer som i en nödsituation skall ta med sig EPIRBerna och radratranspondrarna till livbåtar och räddningsflottar skall antecknas på fartygets alarmlista.

FALSKT LARM FRÅN EPIRBERNA

Det har framgått att 406 MHz GMDSS-EPIRBerna rätt ofta ger upphov till falskt larm, varav en del berott på ett fel i den norska jordstationens dataprogram. Falska larm har också kommit från finska fartyg. De har nästan undantagslöst berott på att man inte kunnat använda utrustningen rätt. Befälet bör omsorgsfullt studera bruksanvisningen och också ge manskapet direktiv angående målning, spolning m.m.

EPIRBerna får inte fästas med rep vid fartyget.

Allt efter som batterierna i 121,5 (243) MHz EPIRBerna enligt SOLAS/III/6.2.3 (1983 års tillägg) blir gamla, avlägsnas dessa EPIRBer helt och hållt (SOLAS III/6.1, 1988 års tillägg).

ANSKAFFNING AV RADARTRANSPODRAR (SART)

Fr.o.m. 1.2.1995 har radartranspondrar varit obligatoriska på fartyg i internationell trafik. Enligt övergångsregeln skall passagerarfartyg i internationell trafik och lastfartyg med en bruttodräktighet av minst 500 har två radartranspondrar, en på vardera sida.

På lastfartyg i internationell trafik vilkas bruttodräktighet understiger 500 är det tillräckligt med en radartransponder. Radartranspondrarna kan förvaras på kommandobryggan invid ytterdörrarna.

Fr.o.m. 1.2.1995 skall ovan nämnda fartyg också vara utrustade med en 3 cm (9 GHz) radar.

RADIOMEDICAL

Enligt ett avtal mellan sjöfartsstyrelsen och Telecom Finland Oy/radiotjänster styrs radiomedical-samtalen direkt till Helsingfors universitets centralsjukhus (HUCS), som kan kontaktas per:

- telefon (90) 4711
- telefax (90) 471 5500
- teletex 1002758.

Giftinformationscentralen kan även kontaktas direkt kl. 8.00 - 22.00:

- telefon (90) 414 392
- telefax (90) 471 4702.

Medicinsk rådgivning ges även av läkarhelikopterns (Medi-Heli) personal. Den som ringer skall själv berätta för kustradiostationen vem han/hon vill ha kontakt med. Det är också möjligt att ta ett vanligt adresserat samtal. Telefonnumren är:

- (90) 441 144 eller
- (90) 827 5500.

Evakuering inom finländskt sjöräddningsområde skall alltid skötas via sjöräddningscentralen enligt följande:

Fartyg som befinner sig inom finländskt sjöräddningsområde skall be om sjuktransport via Åbo sjöräddningscentral eller sjöräddningsundercentralerna (Helsingfors, Vasa). Direkt kontakt med läkarhelikoptrarna kan leda till missförstånd och i vissa fall till att två helikoptrar larmas för att ta hand om samma patienttransport.

TURKU RADIO

Sjöfartsverket har grundat en egen radiostation i Pärnäs. Stationen kommer att ta hand om säkerhetskommunikationerna, radiomedical och vid behov även nödkommunikationerna. Stationen kommer att ha tillgång till MF- och MF-DSC- samt VHF- och VHF-DSC-nätverk som omfattar hela kusten och den kommer att fungera i samarbete med Åbo sjöräddningscentral. Stationen nyttjar Teles basstationer genom fjärrmanövrering och är i fullständigt operativt skick 1.1.1997.

ELEKTROMAGNETISKA STÖRNINGAR ORSAKADE AV RADIOUTRUSTNINGEN OMBORD

Fartygs radioutrustning skall testas på så sätt, att övrig elektrisk eller elektronisk kontrollutrustning och annan dylik utrustning är påkopplad. Därigenom säkerställs att radioutrustningen inte leder till överraskande störningar i fartygets styrning. Testet kan lätt anordnas t.ex. i form av en provkörning och bör alltid anordnas när exempelvis nya ficktelefoner har anskaffats. Därtill bör hänsyn tas till det sakra strålskyddsavstånd som tillverkaren angivit.

Internationella sjöfartsorganisationen (IMO) har i resolution A.813(19) gett en rekommendation som gäller elektrisk och elektronisk utrustnings elektromagnetiska kompatibilitet (bilaga 2).

I Det Norske Veritas olycksfallsmeddelande nr 4/94 redogörs för de elektromagnetiska störningarna som uppkommit på ett fartyg (bilaga 3).

DSC-UTRUSTNINGENS KOMPATIBILITET MED BEFINTLIG UTRUSTNING

De nuvarande sjö-VHF-radiotelefonerna blir inte omoderna vad radiotelefonin beträffar men det är tekniskt omöjligt att koppla DSC-utrustning till alla modeller. Alla VHF-radiotelefoner har inte heller godkänts för användning tillsammans med DSC-utrustningen.

Teleförvalningscentralen ger närmare information om sådana sjö-VHF/DSC-kombinationer som fyller kraven.

KOMMANDE HÄNDELSER OCH FÖRÄNDRINGAR FÖRESKRIVNA I SOLAS-KONVENTIONENS IV OCH V KAP. (bilaga 4)

1. GMDSS-utrustade konventionsfartyg, vilkas köl har sträckts 1.2.1997 eller senare kan fritas från skyldigheten att ha
 - 2182 kHz vaktmottagare och
 - 2182 kHz TTG-signaleringsapparat.
2. Existerande passagerarfartyg, vilkas köl har sträckts före 1.7.1997, skall uppfylla följande krav vid den första periodiska besiktning som förrättas 1.7.1997 eller senare:
 - 2.1 Manöverpositionen skall förses med en gemensam eller en från var sin apparat separat knapp för aktivering av nödlarmet och med en synlig och hörbar larmindikering.
 - 2.2 Om en icke-fjärrstyrd EPIRB används som sekundär larmanordning (förteckningen över utrustningen/Form P, radioutrustning, punkt 2) skall det finnas ytterligare en EPIRB i styrplatsens närhet.
 - 2.3 Kontinuerliga uppgifter om positionen skall överföras till radioutrustningen från något av fartygets automatiska navigationsinstrument.
 - 2.4 En tvåvägs flygradio som fungerar på frekvenserna 121,5 MHz och 123,1 MHz skall finnas vid styrplatsen. Ett vaktgående befäl skall innehålla tilläggsbehörighet för flygradio (certifikat över godkänd 2-3 dagars kurs avlagd vid luftfartsinstitut el. dyl.).
3. Fr.o.m. 1.7.1997 skall nya passagerarfartyg uppfylla kraven i punkterna 2.1, 2.2, 2.3 och 2.4.
4. Fr.o.m. 1.7.1997 kan passagerarfartyg som uppfyller GMDSS-kraven inte få andra dispenser än de som nämns i IV kap. regel 3 till SOLAS-konventionen.
5. Senast 1.7.1997 skall på alla passagerarfartyg en person med tillräcklig kompetens utses till ansvarig för nødkommunikationerna.
6. Senast 1.2.1999 skall alla konventionsfartyg uppfylla de GMDSS-krav som gäller respektive trafikområde.
7. Alla radio- ja skeppsmätningsdispenser upphör att gälla 31.1.1999.

TESTNING AV GMDSS-SYSTEMETS DSC-UTRUSTNING

Vid sin 37:e session utarbetade IMO:s radiounderkommitté en rekommendation om testning av MF-DSC-utrustning vid ankomst till eller avfärd från hamn (COM/Circ.106, bilaga 5). Provdriften i samband med installationen av DSC-utrustningen har orsakat ett antal falska alarm, varför Teleförvaltningscentralen har gett ut anvisningar om testning av DSC-utrustningen (bilaga 6).

DSC-sändare som ingår i GMDSS-systemet får användas endast av personer som innehar certifikat för skötsel av radiostationen (GOC-certifikat). Detta gäller även testningen i samband med utrustningens installation, om en sändare används i det sammanhanget.

Finska fartyg skall testa sin MF-DSC-utrustning enligt anvisningarna en gång per vecka vid ankomst till hamn. Testningen skall göras omsorgsfullt och akt skall ges på att falskt nødlarm inte går ut. Ett IMO-cirkulär om falska nødlarm (COM/Circ.127. Guidelines for Avoiding False Distress Alerts, bilaga 7) kommer att sättas i kraft inom kort.

BILAGA 1

UTBYTE AV DET GAMLA GOC-CERTIFIKATET MOT ETT NYTT

Det finländska GOC-certifikat som utfärdats före 31.10.1994 saknar hänvisning till GMDSS-systemet och till den europeiska rekommendation som givits om GOC-examen. På grund av dessa brister har myndigheterna i vissa länder begärt tilläggsutredningar. Teleförvalningscentralen har förnyat blanketten för GOC-certifikat. Ett GOC-certifikat av gammal modell som utfärdats före 31.10.1994 kan bytas ut mot ett nytt. Det nya certifikatet beviljas kostnadsfritt. Detta gäller inte certifikat som utfärdas för första gången. För dem uppårs normal certifikatsavgift.

Certifikatet kan bytas ut genom återsändande av bifogade blankett omsorgsfullt ifyllt till

Teleförvalningscentralen, Trafiksektionen/GOC, PB 53, 00211 HELSINGFORS

Ett officiellt passfotografi som inte är äldre än två år skall bifogas. De förnyade certifikaten skickas som vanlig brevförsändelse till den adress som uppgivits på ansökningsblanketten. Om utdelningsadressen inte är sökandens egen postadress, är det mycket viktigt att man också uppger vem adressen tillhör, t.ex. genom att använda beteckningen "c/o".

Det gamla GOC-certifikatet behöver inte återsändas till Teleförvalningscentralen utan innehavaren kan själv makulera det.

Innan certifikatet tas i bruk skall det förses med innehavarens namnteckning. Namnteckningen skall göras på därtill reserverad plats.

Släkt- och förnamn		Födelseort	Personbeteckning
Utdelningsadress		Postnummer	Postanstalt
Utdelningsadress (om annan än sökandens egen adress)			Telefonnummer under tjänstetid
Datum för utfärdande och nummer för det tidigare GOC-certifikatet	Tilläggssuppgifter		
Ort och datum		Underskrift	
TELEHALLINTOKESKUKSEN MERKINTÖJÄ			
Myöntämispälvä		Allekirjoittaja	Todistuksen numero

**ASSEMBLY**

19th session
Agenda item 10

RESOLUTION A.813(19)
adopted on 23 November 1995**GENERAL REQUIREMENTS FOR ELECTROMAGNETIC COMPATIBILITY (EMC)
FOR ALL ELECTRICAL AND ELECTRONIC SHIP'S EQUIPMENT**

THE ASSEMBLY,

RECALLING Article 15(j) of the Convention on the International Maritime Organization concerning the functions of the Assembly in relation to regulations and guidelines concerning maritime safety,

RECALLING ALSO resolution A.694(17), which requires that all reasonable and practical steps should be taken to ensure electromagnetic compatibility between the equipment concerned and other radiocommunication and navigational equipment carried on board in accordance with the relevant requirements of chapters IV and V of the International Convention for the Safety of Life at Sea (SOLAS), 1974,*

NOTING the growing number of problems experienced with equipment that is susceptible to electromagnetic interference, which can result in dangerous situations,

NOTING ALSO that some standards on electromagnetic compatibility have been developed,

RECOGNIZING the need to prepare standards on electromagnetic compatibility for all electrical and electronic ship's equipment to ensure the operational reliability and suitability of such equipment,

HAVING CONSIDERED the recommendation made by the Maritime Safety Committee at its sixty-fifth session,

INVITES Governments to ensure that all ship's electrical and electronic equipment is tested to the relevant electromagnetic compatibility standards.

* IEC Publications 533 and 945.



CASUALTY INFORMATION

Published by Det Norske Veritas Classification AS

No 4/94

Edited by DSO-245

SHIP TYPE:Passenger ferry

SIZE (GRT): 35000

YEAR OF BUILD: 1989

ELECTROMAGNETIC INTERFERENCE

Course of Events:

Two incidents of double auxiliary engine shut down and subsequent blackout occurred while in shallow coastal waters. This in turn caused all main engines to stop.

Extent of Damage:

No damage was done, as the vessel, due to an element of luck and the skill of the bridge personnel, was able to steer clear of nearby obstacles even with no engine power. Hydraulic pressure for the steering gear was maintained by gas accumulators. The result could otherwise have been heavy grounding.

Probable Cause:

The reason for the double auxiliary engine shutdown was suspected to be electromagnetic interference from portable communication equipment transmitting from the engine room. Later tests confirmed the suspicion. The electromagnetic noise reacted with the crankcase oil mist detectors of both auxiliary engines, as new developments in the technology of communication equipment have seen carrier wave frequencies higher than those previously in use for such equipment. After the first of the two incidents, transmission from this kind of communication equipment while in the engine room was prohibited. However, users of the equipment were not aware that an automatic answering mode installed in the equipment, caused automatic transmission of a "received but not able to answer" signal with no intervention from the user of the equipment, when a call was directed. A second shutdown occurred shortly after and as a result, there is now a general prohibition on bringing such communication equipment into the engine room.

Lessons to be Learned:

- Portable communication equipment not previously used has to be tested on board during controlled conditions when loss of propulsion/steering action will not cause danger.
- In general, all equipment radiating electromagnetic signals shall be tested before being adopted for general use on board. This includes fixed and portable communication equipment and units containing microprocessors, among others.
- Electronic equipment crucial for navigation, propulsion and steering should preferably be type approved.
- The Type Approval process includes EMI testing including radiated and conducted electric/electronic noise.

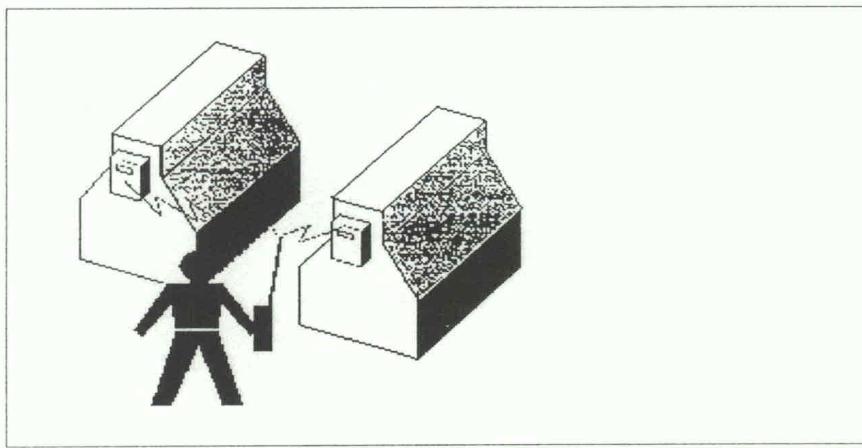


Fig. 1



CONFERENCE OF CONTRACTING
GOVERNMENTS TO THE
INTERNATIONAL CONVENTION FOR
THE SAFETY OF LIFE AT SEA, 1974

Agenda items 6 and 7

**CONSIDERATION AND ADOPTION OF AMENDMENTS TO THE INTERNATIONAL
CONVENTION FOR THE SAFETY OF LIFE AT SEA, 1974**

**CONSIDERATION AND ADOPTION OF RESOLUTIONS AND
RECOMMENDATIONS AND RELATED MATTERS**

**Conference resolution 1 and amendments to the 1974 SOLAS Convention
annexed thereto and Conference resolutions 2 to 14**

As adopted by the Conference

Attached in the annex are the texts of:

- .1 Conference resolution 1 and amendments to the International Convention for the Safety of Life at Sea, 1974 annexed thereto, as set out in attachment 1 to the Final Act of the Conference : and
- .2 Conference resolutions 2 to 14, as set out in attachment 2 to the Final Act of the Conference.

ANNEX**ATTACHMENT 1 TO THE FINAL ACT OF THE CONFERENCE****RESOLUTION 1 OF THE CONFERENCE OF CONTRACTING GOVERNMENTS TO
THE INTERNATIONAL CONVENTION FOR THE SAFETY OF LIFE AT SEA, 1974
ADOPTED ON 29 NOVEMBER 1995****ADOPTION OF AMENDMENTS TO THE ANNEX TO THE INTERNATIONAL
CONVENTION FOR THE SAFETY OF LIFE AT SEA, 1974**

THE CONFERENCE,

RECALLING article VIII (c) of the International Convention for the Safety of Life at Sea, 1974 (hereinafter referred to as "the Convention") concerning the procedure for amending the Convention by a Conference of Contracting Governments,

NOTING resolution A.596(15) adopted by the Assembly of the International Maritime Organization (IMO), concerning the safety of ro-ro ships,

NOTING FURTHER resolutions MSC.11(55), MSC.12(56), MSC.24(60), MSC.26(60) and MSC.27(61) by which amendments to the Convention were adopted by the Maritime Safety Committee of IMO aimed at enhancing the safety of new and existing ro-ro passenger ships, as appropriate,

EXPRESSING ITS CONCERN that, since the adoption of the aforementioned amendments, a number of ro-ro passenger ships have been involved in casualties, one of which has resulted in severe loss of life,

RECOGNIZING the urgent need to further improve the safety standards in all aspects of the design, equipment and operation of ro-ro passenger ships to avoid recurrence of such casualties,

HAVING CONSIDERED amendments to the Annex to the Convention proposed and circulated to all Members of the International Maritime Organization and all Contracting Governments to the Convention,

1. **ADOPTS**, in accordance with article VIII(c)(ii) of the Convention, amendments to the Annex to the Convention the text of which is set out in the Annex to the present resolution;
2. **DETERMINES**, in accordance with article VIII(b)(vi)(2)(bb) of the Convention, that the amendments shall be deemed to have been accepted on 1 January 1997, unless, prior to this date, more than one third of Contracting Governments to the Convention or Contracting Governments the combined merchant fleets of which constitute not less than 50% of the gross tonnage of the world's merchant fleet, have notified their objections to the amendments;
3. **INVITES** Contracting Governments to note that, in accordance with article VIII(b)(vii)(2) of the Convention, the amendments shall enter into force on 1 July 1997 upon their acceptance in accordance with paragraph 2 above.

ANNEX

**AMENDMENTS TO THE ANNEX TO THE INTERNATIONAL CONVENTION
FOR THE SAFETY OF LIFE AT SEA, 1974**

CHAPTER II-1

**CONSTRUCTION - SUBDIVISION AND STABILITY, MACHINERY
AND ELECTRICAL INSTALLATIONS**

Regulation 1 - Application

- 1 In paragraph 3.2, the reference to "regulation 8.9" is replaced by "regulation 8-1".

Regulation 2 - Definitions

- 2 The following new paragraph 13 is added after the existing paragraph 12:

"13 *Ro-ro passenger ship* means a passenger ship with ro-ro cargo spaces or special category spaces as defined in regulation II-2/3."

Regulation 8 - Stability of passenger ships in damaged condition

- 3 In the text in the parenthesis following the title, the reference to "paragraph 9" is replaced by "regulation 8-1".

- 4 The existing paragraph 2.3.5 is deleted.

- 5 The following new sentence is added after the existing first sentence of paragraph 7.4:

"The determination of the ship's stability shall always be made by calculation".

- 6 Existing paragraph 9 is deleted.

- 7 The following new regulations 8-1 and 8-2 are added after existing regulation 8:

"Regulation 8-1

Stability of ro-ro passenger ships in damaged condition*

Ro-ro passenger ships constructed before 1 July 1997 shall comply with regulation 8, as amended by resolution MSC.12(56), not later than the date of the first periodical survey after the date of compliance

* For the application of specific stability requirements to ro-ro passenger ships, refer to resolution 14 of the 1995 SOLAS Conference.

prescribed below, according to the value of A/A_{max} as defined in the annex of the Calculation procedure to assess the survivability characteristics of existing ro-ro passenger ships when using a simplified method based upon resolution A.265(VIII), developed by the Maritime Safety Committee at its fifty-ninth session in June 1991 (MSC/Circ.574).

Value of A/A_{max}	Date of compliance
less than 85%	1 October 1998
85% or more but less than 90%	1 October 2000
90% or more but less than 95%	1 October 2002
95% or more but less than 97.5%	1 October 2004
97.5% or more	1 October 2005

Regulation 8-2

Special requirements for ro-ro passenger ships carrying 400 persons or more

Notwithstanding the provisions of regulations 8 and 8-1:

- .1 ro-ro passenger ships certified to carry 400 persons or more constructed on or after 1 July 1997 shall comply with the provisions of paragraph 2.3 of regulation 8, assuming the damage applied anywhere within the ship's length L; and
- .2 ro-ro passenger ships certified to carry 400 persons or more constructed before 1 July 1997 shall comply with the requirements of subparagraph .1 not later than the date of the first periodical survey after the date of compliance prescribed in subparagraph .2.1, .2.2 or .2.3 which occurs the latest:

.2.1	Value of A/A_{max}	Date of compliance
less than 85 %	1 October 1998	
85 % or more but less than 90 %	1 October 2000	
90 % or more but less than 95 %	1 October 2002	
95 % or more but less than 97.5%	1 October 2004	
97.5 % or more	1 October 2010	

.2.2	Number of persons permitted to be carried	
1500 or more	1 October 2002	
1000 or more but less than 1500	1 October 2006	
600 or more but less than 1000	1 October 2008	
400 or more but less than 600	1 October 2010	

.2.3	Age of the ship equal to or greater than	
	20 years,	

where the age of the ship means the time counted from the date on which the keel was laid or the date on which it was at a similar stage of construction or from the date on which the ship was converted to a ro-ro passenger ship.

Regulation 10 - Peak and machinery space bulkheads, shaft tunnels, etc., in passenger ships

8 The existing text of paragraphs 3 and 4 is replaced by the following:

"3 Where a long forward superstructure is fitted, the forepeak or collision bulkhead on all passenger ships shall be extended weathertight to the next full deck above the bulkhead deck. The extension shall be so arranged as to preclude the possibility of the bow door causing damage to it in the case of damage to, or detachment of, a bow door.

4 The extension required in paragraph 3 need not be fitted directly above the bulkhead below, provided that all parts of the extension are not located forward of the forward limit specified in paragraph 1 or paragraph 2. However, in ships constructed before 1 July 1997:

- .1 where a sloping ramp forms part of the extension, the part of the extension, which is more than 2.3 m above the bulkhead deck, may extend no more than 1 m forward of the forward limits specified in paragraph 1 or paragraph 2; and
- .2 where the existing ramp does not comply with the requirements for acceptance as an extension to the collision bulkhead and the position of the ramp prevents the siting of such extension within the limits specified in paragraph 1 or paragraph 2, the extension may be sited within a limited distance aft of the aft limit specified in paragraph 1 or paragraph 2. The limited distance aft should be no more than is necessary to ensure non interference with the ramp. The extension to the collision bulkhead shall open forward and comply with the requirements of paragraph 3 and shall be so arranged as to preclude the possibility of the ramp causing damage to it in the case of damage to, or detachment of, the ramp.

5 Ramps not meeting the above requirements shall be disregarded as an extension of the collision bulkhead.

6 In ships constructed before 1 July 1997, the requirements of paragraphs 3 and 4 shall apply not later than the date of the first periodical survey after 1 July 1997".

9 Existing paragraphs 5 and 6 are renumbered as paragraphs 7 and 8.

Regulation 15 - Openings in watertight bulkheads in passenger ships

10 The following new paragraph 6.5 is added after existing paragraph 6.4:

"6.5 In ships constructed before 1 February 1992, doors which do not comply with paragraphs 6.1 to 6.4 shall be closed before the voyage commences, and shall be kept closed during navigation; the time of opening such doors in port and of closing them before the ship leaves port shall be entered into the log-book."

Regulation 19 - Construction and initial tests of watertight decks, trunks, etc., in passenger ships and cargo ships

11 The following new paragraphs 2, 3 and 4 are added after existing paragraph 1:

"2 Where a ventilation trunk passing through a structure penetrates the bulkhead deck, the trunk shall be capable of withstanding the water pressure that may be present within the trunk, after having taken into account the maximum heel angle allowable during intermediate stages of flooding, in accordance with regulation 8.5.

3 Where all or part of the penetration of the bulkhead deck is on the main ro-ro deck, the trunk shall be capable of withstanding impact pressure due to internal water motions (sloshing) of water trapped on the ro-ro deck.

4 In ships constructed before 1 July 1997, the requirements of paragraph 2 shall apply not later than the date of the first periodical survey after 1 July 1997."

12 Existing paragraph 2 is renumbered as paragraph 5.

Regulation 20 - Watertight integrity of passenger ships above the margin line

13 The following new paragraph 3 is added after existing paragraph 2:

"3 In passenger ships constructed on or after 1 July 1997, the open end of air pipes terminating within a superstructure shall be at least 1 m above the waterline when the ship heels to an angle of 15°, or the maximum angle of heel during intermediate stages of flooding, as determined by direct calculation, whichever is the greater. Alternatively, air pipes from tanks other than oil tanks may discharge through the side of the superstructure. The provisions of this paragraph are without prejudice to the provisions of the International Convention on Load Lines in force."

14 The existing paragraphs 3 and 4 are renumbered as paragraphs 4 and 5.

15 The following new regulations 20-2 to 20-4 are added after existing regulation 20-1:

"Regulation 20-2

Watertight integrity from the ro-ro deck (bulkhead deck) to spaces below

1 In ro-ro passenger ships constructed on or after 1 July 1997:

.1 subject to the provisions of subparagraphs .2 and .3, all accesses that lead to spaces below the bulkhead deck shall have a lowest point which is not less than 2.5 m above the bulkhead deck;

.2 where vehicle ramps are installed to give access to spaces below the bulkhead deck, their openings shall be able to be closed weathertight to prevent ingress of water below, alarmed and indicated to the navigation bridge;

- .3 the Administration may permit the fitting of particular accesses to spaces below the bulkhead deck provided they are necessary for the essential working of the ship, e.g. the movement of machinery and stores, subject to such accesses being made watertight, alarmed and indicated to the navigation bridge;
 - .4 the accesses referred to in subparagraphs .2 and .3 shall be closed before the ship leaves the berth on any voyage and shall remain closed until the ship is at its next berth;
 - .5 the master shall ensure that an effective system of supervision and reporting of the closing and opening of such accesses referred to in subparagraphs .2 and .3 is implemented; and
 - .6 the master shall ensure, before the ship leaves the berth on any voyage, that an entry in the log-book, as required by regulation 25, is made of the time of the last closing of the accesses referred to in subparagraphs .2 and .3.
- 2 In ro-ro passenger ships constructed before 1 July 1997:
- .1 all accesses from the ro-ro deck that lead to spaces below the bulkhead deck shall be made weathertight and means shall be provided on the navigation bridge, indicating whether the access is open or closed;
 - .2 all such accesses shall be closed before the ship leaves the berth on any voyage and shall remain closed until the ship is at its next berth;
 - .3 notwithstanding the requirements of subparagraph .2, the Administration may permit some accesses to be opened during the voyage but only for a period sufficient to permit through passage and, if required, for the essential working of the ship; and
 - .4 the requirements of subparagraph .1 shall apply not later than the date of the first periodical survey after 1 July 1997.

Regulation 20-3

Access to ro-ro decks

In all ro-ro passenger ships, the master or the designated officer shall ensure that, without the expressed consent of the master or the designated officer, no passengers are allowed access to an enclosed ro-ro deck when the ship is underway.

Regulation 20-4

Closure of bulkheads on the ro-ro deck

1 All transverse or longitudinal bulkheads which are taken into account as effective to confine the seawater accumulated on the ro-ro deck shall be in place and secured before the ship leaves the berth and remain in place and secured until the ship is at its next berth.

2 Notwithstanding the requirements of paragraph 1, the Administration may permit some accesses within such bulkheads to be opened during the voyage but only for sufficient time to permit through passage and, if required, for the essential working of the ship."

Regulation 23-2 - Integrity of the hull and superstructure, damage prevention and control

16 The existing text of regulation 23-2 is replaced by the following:

"(This regulation applies to all ro-ro passenger ships, except that for ships constructed before 1 July 1997, paragraph 2 shall apply not later than the date of the first periodical survey after 1 July 1997)

1 Indicators shall be provided on the navigation bridge for all shell doors, loading doors and other closing appliances which, if left open or not properly secured, could, in the opinion of the Administration, lead to flooding of a special category space or ro-ro cargo space. The indicator system shall be designed on the fail-safe principle and shall show by visual alarms if the door is not fully closed or if any of the securing arrangements are not in place and fully locked and by audible alarms if such door or closing appliances become open or the securing arrangements become unsecured. The indicator panel on the navigation bridge shall be equipped with a mode selection function "harbour/sea voyage" so arranged that an audible alarm is given on the navigation bridge if the ship leaves harbour with the bow doors, inner doors, stern ramp or any other side shell doors not closed or any closing device not in the correct position. The power supply for the indicator system shall be independent of the power supply for operating and securing the doors. The indicator systems, approved by the Administration, which were installed on ships constructed before 1 July 1997 need not be changed.

2 Television surveillance and a water leakage detection system shall be arranged to provide an indication to the navigation bridge and to the engine control station of any leakage through inner and outer bow doors, stern doors or any other shell doors which could lead to flooding of special category spaces or ro-ro cargo spaces.

3 Special category spaces and ro-ro cargo spaces shall be continuously patrolled or monitored by effective means, such as television surveillance, so that any movement of vehicles in adverse weather conditions and unauthorized access by passengers thereto can be detected whilst the ship is underway.

4 Documented operating procedures for closing and securing all shell doors, loading doors and other closing appliances which, if left open or not properly secured, could, in the opinion of the Administration, lead to flooding of a special category space or ro-ro cargo space, shall be kept on board and posted at an appropriate place."

Regulation 45 - Precautions against shock, fire and other hazards of electrical origin

- 17 The following new sentence is added after the existing first sentence of paragraph 5.3:

"In ro-ro passenger ships, cabling for emergency alarms and public address systems installed on or after 1 July 1998 shall be approved by the Administration having regard to the recommendations developed by the Organization¹."

CHAPTER II-2

CONSTRUCTION - FIRE PROTECTION, FIRE DETECTION AND FIRE EXTINCTION

Regulation 3 - Definitions

- 18 The following new paragraph 34 is added after existing paragraph 33:

"34 *Ro-ro passenger ship* means a passenger ship with ro-ro cargo spaces or special category spaces as defined in this regulation."

- 19 The following new regulation 28-1 is added after existing regulation 28:

"Regulation 28-1

Escape routes on ro-ro passenger ships

1 Requirements applicable to all ro-ro passenger ships

1.1 This paragraph shall apply to all ro-ro passenger ships. For ships constructed before 1 July 1997 the requirements of the regulation shall apply not later than the date of the first periodical survey after 1 July 1997.

1.2 Handrails or other handholds shall be provided in all corridors along the entire escape route, so that a firm handhold is available every step of the way, where possible, to the assembly stations and embarkation stations. Such handrails shall be provided on both sides of longitudinal corridors more than 1.8 m in width and transverse corridors more than 1 m in width. Particular attention shall be paid to the need to be able to cross lobbies, atriums and other large open spaces along escape routes. Handrails and other handholds shall be of such strength as to withstand a distributed horizontal load of 750 N/m applied in the direction of the centre of the corridor or space, and a distributed vertical load of 750 N/m applied in the downward direction. The two loads need not be applied simultaneously.

¹ Refer to the recommendations for cabling for emergency alarms and public address systems to be developed by the Organization.

1.3 Escape routes shall not be obstructed by furniture and other obstructions. With the exception of tables and chairs which may be cleared to provide open space, cabinets and other heavy furnishings in public spaces and along escape routes shall be secured in place to prevent shifting if the ship rolls or lists. Floor coverings shall also be secured in place. When the ship is underway, escape routes shall be kept clear of obstructions such as cleaning carts, bedding, luggage and boxes of goods.

1.4 Escape routes shall be provided from every normally occupied space on the ship to an assembly station. These escape routes shall be arranged so as to provide the most direct route possible to the assembly station, and shall be marked with symbols in accordance with the recommendations of the Organization.²

1.5 Where enclosed spaces adjoin an open deck, openings from the enclosed space to the open deck shall, where practicable, be capable of being used as an emergency exit.

1.6 Decks shall be sequentially numbered, starting with "1" at the tank top or lowest deck. These numbers shall be prominently displayed at stair landings and lift lobbies. Decks may also be named, but the deck number shall always be displayed with the name.

1.7 Simple "mimic" plans showing the "you are here" position and escape routes marked by arrows, shall be prominently displayed on the inside of each cabin door and in public spaces. The plan shall show the directions of escape, and shall be properly oriented in relation to its position on the ship.

1.8 Cabin and stateroom doors shall not require keys to unlock them from inside the room. Neither shall there be any doors along any designed escape route which require keys to unlock them when moving in the direction of escape.

2 Requirements applicable to ro-ro passenger ships constructed on or after 1 July 1997

2.1 The lowest 0.5 m of bulkheads and other partitions forming vertical divisions along escape routes shall be able to sustain a load of 750 N/m to allow them to be used as walking surfaces from the side of the escape route with the ship at large angles of heel.

2.2 The escape route from cabins to stairway enclosures shall be as direct as possible, with a minimum number of changes in direction. It shall not be necessary to cross from one side of the ship to the other to reach an escape route. It shall not be necessary to climb more than two decks up or down in order to reach an assembly station or open deck from any passenger space.

2.3 External routes shall be provided from open decks, referred to in paragraph 2.2, to the survival craft embarkation stations.

² Refer to Symbols related to life-saving appliances and arrangements, adopted by the Organization by resolution A.760(18).

3 Requirements applicable to ro-ro passenger ships constructed on or after 1 July 1999

For ro-ro passenger ships constructed on or after 1 July 1999, escape routes shall be evaluated by an evacuation analysis early in the design process. The analysis shall be used to identify and eliminate, as far as practicable, congestion which may develop during an abandonment, due to normal movement of passengers and crew along escape routes, including the possibility that crew may need to move along these routes in a direction opposite the movement of passengers. In addition, the analysis shall be used to demonstrate that escape arrangements are sufficiently flexible to provide for the possibility that certain escape routes, assembly stations, embarkation stations or survival craft may not be available as a result of a casualty.

Regulation 37 - Protection of special category spaces

- 20 Existing paragraph 2.1 is renumbered as paragraph 2.1.1.
- 21 The following new paragraph 2.1.2 is added after the renumbered paragraph 2.1.1:
- "2.1.2 Discharges
- 2.1.2.1 In all ro-ro passenger ships discharge valves for scuppers, fitted with positive means of closing operable from a position above the bulkhead deck in accordance with the requirements of the International Convention on Load Lines in force, shall be kept open while the ships are at sea.
- 2.1.2.2 Any operation of the valves referred to in paragraph 2.1.2.1 shall be recorded in the log-book."

CHAPTER III

LIFE-SAVING APPLIANCES AND ARRANGEMENTS

Regulation 3 - Definitions

- 22 The following new paragraph 19 is added after existing paragraph 18:
- "19 *Ro-ro passenger ship* means a passenger ship with ro-ro cargo spaces or special category spaces as defined in regulation II-2/3."

Regulation 6 - Communications

- 23 The following new paragraph 5 is added after existing paragraph 4:

"5 Public address systems on passenger ships

5.1 In addition to the requirements of regulation II-2/40.5 or regulation II-2/41-2, as appropriate, and of paragraph 4.2, all passenger ships shall be fitted with a public address system. With respect to passenger ships constructed before 1 July 1997 the requirements of paragraphs 5.2, 5.3 and 5.5, subject to the provisions of paragraph 5.6, shall apply not later than the date of the first periodical survey after 1 July 1997.

5.2 The public address system shall be one complete system consisting of a loudspeaker installation which enables simultaneous broadcast of messages to all spaces where crew members or passengers, or both, are normally present and to assembly stations. The public address system shall provide for the broadcast of messages from the navigation bridge and such other places on board as the Administration deems necessary.

5.3 The public address system shall be protected against unauthorized use and be clearly audible above the ambient noise in all spaces, prescribed by paragraph 5.2, and shall be provided with an override function controlled from one location on the navigation bridge and such other places on board as the Administration deems necessary, so that all emergency messages will be broadcast if any loudspeaker in the spaces concerned has been switched off, its volume has been turned down or the public address system is used for other purposes.

5.4 On passenger ships constructed on or after 1 July 1997:

- .1 the public address system shall have at least two loops which shall be sufficiently separated throughout their length and have two separate and independent amplifiers; and
- .2 the public address system and its performance standards shall be approved by the Administration having regard to the recommendations adopted by the Organization.^{3, 4}

5.5 The public address system shall be connected to the emergency source of power.

5.6 Ships constructed before 1 July 1997 which are already fitted with the public address system approved by the Administration which comply substantially with those required by paragraph 5.2, 5.3 and 5.5 are not required to change their system.

24 The following new regulations 24-1 to 24-4 are added after existing regulation 24:

"Regulation 24-1

Requirements for ro-ro passenger ships

1 This regulation applies to all ro-ro passenger ships. Ro-ro passenger ships constructed:

- .1 on or after 1 July 1998 shall comply with the requirements of paragraphs 2.3, 2.4, 3.1, 3.2, 3.3, 4 and 5;
- .2 on or after 1 July 1986 and before 1 July 1998 shall comply with paragraph 5 not later than the first periodical survey after 1 July 1998 and with paragraphs 2.3, 2.4, 3 and 4 not later than the first periodical survey after 1 July 2000; and

³ Refer to the Code on Alarms and Indicators, 1995, adopted by the Organization by resolution A.830(19).

⁴ Refer to performance standards for public address systems, to be developed by the Organization.

.3 before 1 July 1986 shall comply with paragraph 5 not later than the first periodical survey after 1 July 1998 and with paragraphs 2.1, 2.2, 2.3, 2.4, 3 and 4 not later than the first periodical survey after 1 July 2000.

2 Liferafts

2.1 The ro-ro passenger ship's liferafts shall be served by marine evacuation systems complying with regulation 48.5 or launching appliances complying with regulation 48.6, equally distributed on each side of the ship.

2.2 Every liferaft on ro-ro passenger ships shall be provided with float-free stowage arrangements complying with the requirements of regulation 23.

2.3 Every liferaft on ro-ro passenger ships shall be of a type fitted with a boarding ramp complying with the requirements of regulation 39.4.1 or regulation 40.4.1, as appropriate.

2.4 Every liferaft on ro-ro passenger ships shall either be automatically self-righting or be a canopied reversible liferaft which is stable in a seaway and is capable of operating safely whichever way up it is floating. Alternatively, the ship shall carry automatically self-righting liferafts or canopied reversible liferafts, in addition to its normal complement of liferafts, of such aggregate capacity as will accommodate at least 50% of the persons not accommodated in lifeboats. This additional liferaft capacity shall be determined on the basis of the difference between the total number of persons on board and the number of persons accommodated in lifeboats. Every such liferaft shall be approved by the Administration having regard to the recommendations adopted by the Organization.⁵

3 Fast rescue boats

3.1 At least one of the rescue boats on a ro-ro passenger ship shall be a fast rescue boat approved by the Administration having regard to the recommendations adopted by the Organization.⁶

3.2 Each fast rescue boat shall be served by a suitable launching appliance approved by the Administration. When approving such launching appliances, the Administration shall take into account that the fast rescue boat is intended to be launched and retrieved even under severe adverse weather conditions, and also shall have regard to the recommendations adopted by the Organization.⁷

⁵ Refer to the requirements for automatically self-righting liferafts and canopied reversible liferafts, to be developed by the Organization.

⁶ Refer to the Guidelines for fast rescue boats, adopted by the Organization by resolution A.656(16). (To be reviewed and revised taking into account the recommendations of the Nordic group).

⁷ Refer to recommendations to be adopted by the Organization.

3.3 At least two crews of each fast rescue boat shall be trained and drilled regularly having regard to the Seafarers Training, Certification and Watchkeeping (STCW) Code and recommendations adopted by the Organization,⁸ including all aspects of rescue, handling, manoeuvring, operating these craft in various conditions, and righting them after capsize.

3.4 In the case where the arrangement or size of a ro-ro passenger ship, constructed before 1 July 1997, is such as to prevent the installation of the fast rescue boat required by paragraph 3.1, the fast rescue boat may be installed in place of an existing lifeboat which is accepted as a rescue boat or, in the case of ships constructed prior to 1 July 1986, boats for use in an emergency, provided that all of the following conditions are met:

- .1 the fast rescue boat installed is served by a launching appliance complying with the provisions of paragraph 3.2;
- .2 the capacity of the survival craft lost by the above substitution is compensated by the installation of liferafts capable of carrying at least an equal number of persons served by the lifeboat replaced; and
- .3 such liferafts are served by the existing launching appliances or marine evacuation systems.

4 Means of rescue

4.1 Each ro-ro passenger ship shall be equipped with efficient means for rapidly recovering survivors from the water and transferring survivors from rescue units or survival craft to the ship.

4.2 The means of transfer of survivors to the ship may be part of a marine evacuation system, or may be part of a system designed for rescue purposes.

4.3 If the slide of a marine evacuation system is intended to provide the means of transfer of survivors to the deck of the ship, the slide shall be equipped with handlines or ladders to aid in climbing up the slide.

5 Lifejackets

5.1 Notwithstanding the requirements of regulations 7.2 and 21.2, a sufficient number of lifejackets shall be stowed in the vicinity of the assembly stations so that passengers do not have to return to their cabins to collect their lifejackets.

5.2 In ro-ro passenger ships, each lifejacket shall be fitted with a light complying with the requirements of regulation 32.3.

⁸ Refer to the Recommendation on training requirements for crews of fast rescue boats, adopted by the Organization by resolution A.771(18) and section A-VI/2, table A-VI/2-2 "Specification of the minimum standard of competence in fast rescue boats" of the Seafarers' Training, Certification and Watchkeeping (STCW) Code.

Regulation 24-2**Information on passengers**

- 1 All persons on board passenger ships shall be counted prior to departure.
- 2 Details of persons who have declared a need for special care or assistance in emergency situations shall be recorded and communicated to the master prior to departure.
- 3 In addition, not later than 1 January 1999, the names and gender of all persons on board, distinguishing between adults, children and infants shall be recorded for search and rescue purposes.
- 4 The information required by paragraphs 1, 2 and 3 shall be kept ashore and made readily available to search and rescue services when needed.
- 5 Administrations may exempt passenger ships from the requirements of paragraph 3, if the scheduled voyages of such ships render it impracticable for them to prepare such records.

Regulation 24-3**Helicopter landing and pick-up areas**

- 1 All ro-ro passenger ships, shall be provided with a helicopter pick-up area approved by the Administration having regard to the recommendations adopted by the Organization.⁹
- 2 Ro-ro passenger ships constructed before 1 July 1997 shall comply with the requirements of paragraph 1 not later than the date of the first periodical survey after 1 July 1997.
- 3 Passenger ships of 130 m in length and upwards, constructed on or after 1 July 1999, shall be fitted with a helicopter landing area approved by the Administration having regard to the recommendations adopted by the Organization.¹⁰

Regulation 24-4**Decision-support system for masters of passenger ships**

- 1 This regulation applies to all passenger ships. Passenger ships constructed before 1 July 1997 shall comply with the requirements of this regulation not later than the date of the first periodical survey after 1 July 1999.
- 2 In all passenger ships, a decision-support system for emergency management shall be provided on the navigation bridge.

⁹ Refer to the Merchant Ship Search and Rescue Manual (MERSAR), adopted by the Organization by resolution A.229(VII), as amended.

¹⁰ Refer to recommendations to be developed by the Organization.

3 The system shall, as a minimum, consist of a printed emergency plan or plans.¹¹ All foreseeable emergency situations shall be identified in the emergency plan or plans, including but not limited to, the following main groups of emergencies:

- .1 fire;
- .2 damage to ship;
- .3 pollution;
- .4 unlawful acts threatening the safety of the ship and the security of its passengers and crew;
- .5 personnel accidents;
- .6 cargo-related accidents; and
- .7 emergency assistance to other ships.

4 The emergency procedures established in the emergency plan or plans shall provide decision support to masters for handling any combination of emergency situations.

5 The emergency plan or plans shall have a uniform structure and be easy to use. Where applicable, the actual loading condition as calculated for the passenger ship's voyage stability shall be used for damage control purposes.

6 In addition to the printed emergency plan or plans, the Administration may also accept the use of a computer-based decision-support system on the navigation bridge which provides all the information contained in the emergency plan or plans, procedures, checklists, etc., which is able to present a list of recommended actions to be carried out in foreseeable emergencies."

CHAPTER IV

RADIOCOMMUNICATIONS

Regulation 1 - Application

25 In paragraph 5, the reference to "paragraph 4" is replaced by "paragraphs 4 and 7".

26 At the end of paragraph 5.1.2, after the existing date "1992", the phrase "; however, passenger ships irrespective of size shall not be granted any exemption from the requirements of regulation 3 of chapter IV of that Convention" is added.

27 The following new paragraph 7 is added after existing paragraph 6:

"7 Passenger ships constructed before 1 July 1997 shall, as appropriate, comply with the requirements of regulations 6.4, 6.5, 6.6 and 7.5 not later than the date of the first periodical survey after 1 July 1997."

28 Existing paragraph 7 is renumbered as paragraph 8.

¹¹ Refer to the International Safety Management (ISM) Code, chapter 8 and the guidelines for a structure of an integrated system for shipboard emergency plans scheduled to be finalized in 1996.

Regulation 6 - Radio installations

29 The following new paragraphs 4, 5 and 6 are added after existing paragraph 3:

"4 In passenger ships, a distress panel shall be installed at the conning position. This panel shall contain either one single button which, when pressed, initiates a distress alert using all radiocommunication installations required on board for that purpose or one button for each individual installation. The panel shall clearly and visually indicate whenever any button or buttons have been pressed. Means shall be provided to prevent inadvertent activation of the button or buttons. If the satellite EPIRB is used as the secondary means of distress alerting and is not remotely activated, it shall be acceptable to have an additional EPIRB installed in the wheelhouse near the conning position.

5 In passenger ships, information on the ship's position shall be continuously and automatically provided to all relevant radiocommunication equipment to be included in the initial distress alert when the button or buttons on the distress panel is pressed.

6 In passenger ships, a distress alarm panel shall be installed at the conning position. The distress alarm panel shall provide visual and aural indication of any distress alert or alerts received on board and shall also indicate through which radiocommunication service the distress alerts have been received."

Regulation 7 - Radio equipment: General

30 The following new paragraph 5 is added after existing paragraph 4:

"5 Every passenger ship shall be provided with means for two-way on-scene radiocommunications for search and rescue purposes using the aeronautical frequencies 121.5 MHz and 123.1 MHz from the position from which the ship is normally navigated."

Regulation 16 - Radio personnel

31 The existing paragraph is numbered as paragraph 1.

32 The following new paragraph 2 is added after the renumbered paragraph 1:

"2 In passenger ships, at least one person qualified in accordance with paragraph 1 shall be assigned to perform only radiocommunication duties during distress incidents."

CHAPTER V**SAFETY OF NAVIGATION****Regulation 10 - Distress messages: Obligations and procedures**

- 33 The existing text of paragraphs (a) to (d) is replaced by the following:

"(a) The master of a ship at sea which is in a position to be able to provide assistance, on receiving a signal from any source that persons are in distress at sea, is bound to proceed with all speed to their assistance, if possible informing them or the search and rescue service, that the ship is doing so. If the ship receiving the distress alert is unable or, in the special circumstances of the case, considers it unreasonable or unnecessary to proceed to their assistance, the master must enter in the log-book the reason for failing to proceed to the assistance of the persons in distress and, taking into account the recommendations of the Organization,¹² inform the appropriate search and rescue service accordingly.

(b) The master of a ship in distress or the search and rescue service concerned, after consultation, so far as may be possible, with the masters of ships which answer the distress alert, has the right to requisition one or more of those ships such as the master of the ship in distress or the search and rescue service considers best able to render assistance, and it shall be the duty of the master or masters of the ship or ships so requisitioned to comply with the requisition by continuing to proceed with all speed to the assistance of persons in distress.

(c) Masters of ships shall be released from the obligation imposed by paragraph (a) of this regulation on learning that their ships have not been requisitioned and that one or more other ships have been requisitioned and are complying with the requisition. This decision shall, if possible, be communicated to the other requisitioned ships and to the search and rescue service.

(d) The master of a ship shall be released from the obligation imposed by paragraph (a) of this regulation, and, if the ship has been requisitioned, from the obligation imposed by paragraph (b) of this regulation, on being informed by the persons in distress or by the search and rescue service or by the master of another ship which has reached such persons that assistance is no longer necessary."

- 34 The following new regulation 10-1 is added after existing regulation 10:

"Regulation 10-1

Master's discretion for safe navigation

The master shall not be constrained by the shipowner, charterer or any other person from taking any decision which, in the professional judgement of the master, is necessary for safe navigation, in particular in severe weather and in heavy seas."

¹² Refer to the immediate action to be taken by each ship on receipt of a distress message in the Merchant Ship Search and Rescue Manual (MERSAR), as it may be amended.

Regulation 13 - Manning

- 35 The following new paragraph (c) is added after existing paragraph (b):

"(c) On every passenger ship to which chapter I applies, to ensure effective crew performance in safety matters, a working language shall be established and recorded in the ship's log-book. The company¹³ or the master, as appropriate, shall determine the appropriate working language. Each seafarer shall be required to understand and, where appropriate, give orders and instructions and to report back in that language. If the working language is not an official language of the State whose flag the ship is entitled to fly, all plans and lists required to be posted shall include a translation into the working language".

Regulation 15 - Search and rescue

- 36 The following new paragraph (c) is added after existing paragraph (b):

"(c) Passenger ships to which chapter I applies, trading on fixed routes, shall have on board a plan for co-operation with appropriate search and rescue services in event of an emergency. The plan shall be developed in co-operation between the ship and the search and rescue services and be approved by the Administration. The plan shall include provisions for periodic exercises to be undertaken as agreed by the passenger ship and the search and rescue services concerned to test its effectiveness".

- 37 The following new regulation 23 is added after existing regulation 22:

"Regulation 23

Operational limitations

(This regulation applies to all passenger ships to which chapter I applies)

1 On passenger ships constructed before 1 July 1997, the requirements of this regulation shall apply not later than the date of the first periodical survey after 1 July 1997.

2 A list of all limitations on the operation of a passenger ship including exemptions from any of these regulations, restrictions in operating areas, weather restrictions, sea state restrictions, restrictions in permissible loads, trim, speed and any other limitations, whether imposed by the Administration or established during the design or the building stages, shall be compiled before the passenger ship is put in service. The list, together with any necessary explanations, shall be documented in a form acceptable to the Administration, which shall be kept on board readily available to the master. The list shall be kept updated. If the language used is not English or French, the list shall be provided in one of the two languages."

¹³ Company means the owner of the ship or any other organization or person such as the manager, or the bareboat charterer, who has assumed the responsibility for operation of the ship from the owner of the ship and who, on assuming such responsibility, has agreed to take over all the duties and responsibilities imposed by the International Safety Management (ISM) Code.

CHAPTER VI

CARRIAGE OF CARGOES

Regulation 5 - Stowage and securing

38 The following new paragraph 6 is added after existing paragraph 5:

"6 Cargo units, including vehicles and containers, shall be loaded, stowed and secured throughout the voyage in accordance with the Cargo Securing Manual approved by the Administration. In ships with ro-ro cargo spaces, as defined in regulation II-2/3.14, all securing of cargo units, in accordance with the Cargo Securing Manual, shall be completed before the ship leaves the berth. The Cargo Securing Manual shall be drawn up to a standard at least equivalent to the guidelines developed by the Organization.^{14"}

¹⁴

Refer to the guidelines to be developed by the Organization.

ATTACHMENT 2 TO THE FINAL ACT OF THE CONFERENCE

RESOLUTION 2

**FIRE-EXTINGUISHING ARRANGEMENTS IN MACHINERY SPACES
OF PASSENGER SHIPS**

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

BEING OF THE OPINION that the safety of passenger ships would be improved if their machinery spaces were equipped with automatic local extinguishing systems in areas presenting high fire risk, in addition to the installed main fire-extinguishing system,

NOTING that the issue is already in the work programme of the Maritime Safety Committee of the International Maritime Organization (IMO),

1. **URGES** the Maritime Safety Committee of IMO to expedite its work relating to automatic local extinguishing systems;
2. **INVITES** Contracting Governments to encourage the installation of such automatic local extinguishing systems in machinery spaces of passenger ships in areas presenting high fire risk, in addition to the installed main fire-extinguishing system, pending adoption by IMO of the relevant amendments to the 1974 SOLAS Convention.

RESOLUTION 3

ESCAPE ARRANGEMENTS IN SHIPS CONSTRUCTED BEFORE 1 JULY 1997

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that, in accordance with new SOLAS regulation II-2/28-1, ships constructed on or after 1 July 1997 are required to have bulkheads and other partitions forming vertical divisions along escape routes arranged in such a way as to allow them to be used as walking surfaces at large angles of heel,

BEING OF THE OPINION that the safety of passengers on ro-ro passenger ships constructed before 1 July 1997 should be improved by arranging escape routes in such a way that passengers could escape at large angles of heel,

RECOGNIZING that implementation of the fire protection requirements of the 1992 SOLAS amendments may entail modifications to the accommodation spaces of passenger ships,

URGES Contracting Governments to ensure that, when ro-ro passenger ships constructed before 1 July 1997 undergo modifications to the accommodation spaces, consideration is given to the fitting thereon of bulkheads and partitions of the standard prescribed in SOLAS regulation II-2/28-1.

RESOLUTION 4

MAXIMUM EVACUATION TIME FOR NEW RO-RO PASSENGER SHIPS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

CONSIDERING new SOLAS regulation II-2/28-1.3 regarding requirements for an evacuation analysis,

BEING OF THE OPINION that there is need for an evacuation time to be specified within which the evacuation of a ro-ro passenger ship should be completed,

NOTING that it has been proposed that the maximum evacuation time of a ro-ro passenger ship should be 60 minutes,

URGES the Maritime Safety Committee of the International Maritime Organization to consider the maximum evacuation time for ro-ro passenger ships and develop requirements or recommendations, as appropriate.

RESOLUTION 5

AMENDMENTS TO CHAPTER III OF THE 1974 SOLAS CONVENTION

THE CONFERENCE,

HAVING ADOPTED amendments to chapter III of the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that the Maritime Safety Committee (MSC) of the International Maritime Organization (IMO), at its sixty-fifth session, approved proposed amendments to chapter III of the 1974 SOLAS Convention with a view to their adoption at its sixty-sixth session,

RECOGNIZING the necessity of incorporating the amendments to SOLAS chapter III adopted by this Conference in the text of amendments to be considered by the sixty-sixth session of the MSC with a view to adoption,

REQUESTS the Secretary-General to convey to MSC 66 the text of amendments to SOLAS chapter III adopted by the Conference with a view to their incorporation in the revised chapter III.

RESOLUTION 6

**LOW-POWERED RADIO HOMING DEVICES FOR LIFERAFTS
ON RO-RO PASSENGER SHIPS**

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that a low-powered radio homing device for liferafts is intended to operate on a maritime VHF frequency or a UHF frequency and that such an international frequency or frequencies must first be allocated by an International Telecommunication Union (ITU) World Administrative Radio Conference and that the ITU Radiocommunication Bureau will have to develop technical standards for such radio equipment on the basis of operational requirements which the International Maritime Organization (IMO) has yet to prepare,

NOTING FURTHER that this procedure will take some time,

BEING OF THE OPINION that such a low-powered radio homing device for liferafts would greatly assist Search and Rescue (SAR) operations following a ro-ro passenger ship casualty,

1. **INVITES** the Maritime Safety Committee of IMO to:
 - (a) develop, as a matter of urgency, operational requirements and performance standards for low-powered radio homing devices for liferafts; and
 - (b) consider adopting amendments to the SOLAS Convention requiring carriage of low-powered radio homing devices for liferafts on all ro-ro passenger ships, at the earliest opportunity;
2. **INVITES** IMO, in co-operation with ITU, as a matter of priority, to:
 - (a) develop technical standards for low-powered radio homing devices for liferafts; and
 - (b) ensure the allocation of suitable radio frequencies for low-powered radio homing devices for liferafts.

RESOLUTION 7

DEVELOPMENT OF REQUIREMENTS, GUIDELINES AND PERFORMANCE STANDARDS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that a number of the adopted requirements concerning carriage of equipment require such equipment to take account of, or conform to, requirements, guidelines or performance standards adopted by the International Maritime Organization (IMO) which have yet to be developed,

BEING OF THE OPINION that the performance standards referred to above should be developed to enable manufacturers to develop suitable equipment and ships to fit the equipment before the amendments to the SOLAS Convention, adopted by the Conference, enter into force,

REQUESTS the Maritime Safety Committee of IMO to develop as a matter of urgency:

- (a) performance standards for public address systems (regulation III/6.5.4);
- (b) requirements for automatically self-righting liferafts and canopied reversible liferafts (regulation III/24-1.2.4);
- (c) revised guidelines for fast rescue boats (regulation III/24-1.3.1);
- (d) requirements for launching appliances for fast rescue boats (regulation III/24-1.3.2); and
- (e) guidelines for helicopter landing and pick-up areas (regulation III/24-3).

RESOLUTION 8

DISTRESS MESSAGES: OBLIGATIONS AND PROCEDURES

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

CONSIDERING new SOLAS regulation V/10(a) which requires that, if the ship receiving the distress alert is unable or, in the special circumstances of the case, considers it unreasonable or unnecessary to proceed to the assistance of persons in distress, the master thereof must, taking into account the recommendations of the International Maritime Organization (IMO), inform the appropriate search and rescue service accordingly,

NOTING that the recommendations referred to above have to be developed by IMO for use by all seafarers,

BEING OF THE OPINION that the said recommendations should be adopted as amendments to the Merchant Ship Search and Rescue (MERSAR) Manual prior to entry into force of the relevant 1995 SOLAS amendments,

1. **REQUESTS** the Maritime Safety Committee of IMO to prepare and adopt as a matter of urgency amendments to the MERSAR Manual recommending the procedure to be followed by ships receiving a distress alert and failing to proceed to the assistance of persons in distress when it is unreasonable to expect them to do so;

2. **INVITES** Contracting Governments to take steps to ensure that such amendments to the MERSAR Manual are adopted with the minimum delay.

RESOLUTION 9

AUTOMATIC SHIP IDENTIFICATION TRANSPONDER/TRANSCEIVER SYSTEMS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

BEING OF THE OPINION that the safety of navigation would be considerably improved if all ships above a certain size were fitted with ship identification transponder/transceiver systems capable of automatically providing shore stations and other ships with information as to the ship's identity, type, position, course, speed, navigational status and other safety-related information and to receive such information from similarly-fitted ships,

NOTING that the Maritime Safety Committee of the International Maritime Organization (IMO) is conducting a complete review of SOLAS chapter V - Safety of navigation, and is preparing carriage requirements and performance standards for shipborne automatic ship identification transponders,

NOTING FURTHER that automatic ship identification transponder/transceiver systems require the allocation of suitable radio frequencies and development of technical standards for the equipment concerned by the International Telecommunication Union (ITU),

1. **INVITES** the Maritime Safety Committee of IMO to:
 - (a) develop, as a matter of urgency, operational requirements and performance standards for automatic ship identification transponder/transceiver systems; and
 - (b) consider adopting amendments to the SOLAS Convention concerning carriage requirements for such automatic ship transponder/transceiver systems;
2. **INVITES** IMO, in co-operation with ITU, as a matter of priority, to:
 - (a) develop technical standards for automatic ship identification transponder/transceiver systems; and
 - (b) ensure the allocation of suitable radio frequencies for automatic ship identification transponder/transceiver systems.

RESOLUTION 10

ESTABLISHMENT OF WORKING LANGUAGES ON SHIPS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

CONSIDERING new SOLAS regulation V/13(c), which requires that, on every passenger ship to which SOLAS chapter I applies, a working language should be established to ensure effective crew performance in safety matters,

NOTING ALSO that the International Safety Management (ISM) Code, adopted by the Assembly of the International Maritime Organization by resolution A.741(18), prescribes that shipping companies should ensure that ships personnel are able to communicate effectively in the execution of their duties related to the safety management system of their ships,

BEING OF THE OPINION that it would be desirable that the requirements of SOLAS regulation V/13(c) should apply to all ships, whether on international voyages or not,

URGES Contracting Governments to take steps to ensure that a working language is established on all their ships by implementing, as far as practicable, regulation V/13(c).

RESOLUTION 11
OPERATIONAL LIMITATIONS ON PASSENGER SHIPS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

CONSIDERING that new SOLAS regulation V/23 requires that a list of all limitations on the operation of passenger ships to which SOLAS chapter I applies should be kept on board so as to be readily available to the master,

BEING OF THE OPINION that it would be desirable that, where operational limitations on a passenger ship exist, a list of all limitations on the operation of the ship should be kept on board and updated, when necessary, regardless of whether the passenger ship is engaged on international voyages or not,

URGES Contracting Governments to ensure that lists of all operational limitations are maintained on board and kept up-to-date on all their passenger ships so as to be readily available for the information of the master.

RESOLUTION 12

VOYAGE DATA RECORDERS

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that operational requirements and performance standards are under consideration by the International Maritime Organization (IMO) but have yet to be prepared,

BEING OF THE OPINION that it would be desirable that ships, in particular passenger ships, are fitted with a voyage data recorder to assist in investigations into casualties,

1. **REQUESTS** the Maritime Safety Committee of IMO to:

- (a) develop, as a matter of urgency, operational requirements and performance standards for voyage data recorders, taking into account any potential human element implications; and
- (b) consider developing carriage requirements for voyage data recorders for inclusion in SOLAS, at the earliest opportunity;

2. **URGES** Contracting Governments to encourage the use of voyage data recorders on ships under their flags on an experimental basis in order to gain experience in their use.

RESOLUTION 13
CARGO SECURING EQUIPMENT

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

NOTING that SOLAS chapter VI requires cargo units, including containers, to be loaded, stowed and secured throughout the voyage in accordance with a Cargo Securing Manual approved by the Administration,

NOTING FURTHER that the Maritime Safety Committee of the International Maritime Organization (IMO) is developing provisions to be included in the Cargo Securing Manual required by SOLAS chapter VI,

BEING OF THE OPINION that cargo units, including vehicles and containers on ro-ro ships, should be secured using equipment of adequate strength, under all conditions including heeling,

URGES the Maritime Safety Committee of IMO to include, in the provisions to be included in the Cargo Securing Manual, minimum strength requirements for equipment used for securing cargo units, including vehicles and containers on ro-ro ships, taking into account forces due to the motion of the ship, angle of heel after damage or flooding and other considerations relevant to the strength of the cargo securing arrangements.

RESOLUTION 14

**REGIONAL AGREEMENTS ON SPECIFIC STABILITY REQUIREMENTS
FOR RO-RO PASSENGER SHIPS**

THE CONFERENCE,

HAVING ADOPTED amendments to the International Convention for the Safety of Life at Sea (SOLAS), 1974, concerning the safety of ro-ro passenger ships,

CONSIDERING new SOLAS regulation II-1/8-1 by which every ro-ro passenger ship shall comply with regulation II-1/8, as amended by resolution MSC.12(56), in the future,

RECALLING the provisions of article VII of the SOLAS Convention,

ACKNOWLEDGING the desire of certain Contracting Governments that, having regard to the prevailing sea conditions and other local conditions, specific stability requirements should apply to all ro-ro passenger ships undertaking regular scheduled voyages between designated ports of those Contracting Governments,

1. **AGREES** that two or more Contracting Governments may conclude agreements modifying the requirements of regulation II-1/8-1 in respect of every ro-ro passenger ship carrying passengers on regular scheduled voyages between designated ports in their territory, provided that these ships comply with safety requirements which are adequate in the opinion of these Governments for the voyages to be undertaken;

2. **AGREES ALSO** that, if these safety requirements include specific stability requirements, they should not exceed those specified in the Annex to the present resolution;

3. **DECIDES** that Contracting Governments proposing an agreement shall notify the Secretary-General of the International Maritime Organization of their intention to negotiate an agreement and shall make appropriate arrangements for other interested Contracting Governments to be involved in the negotiations. When notifying the Secretary-General of their intention to negotiate an agreement, and on the concluding of an agreement, the Contracting Governments involved shall communicate to the Secretary-General all relevant particulars relating to it for circulation to all Contracting Governments. An agreement shall not enter into force until 12 months after its conclusion has been notified to the Secretary-General;

4. **URGES** all Contracting Governments to apply the provisions of such agreements on ro-ro passenger ships entitled to fly their flags when engaged on regular scheduled voyages between designated ports covered by such agreements.

ANNEX

STABILITY REQUIREMENTS PERTAINING TO THE AGREEMENT

1 In addition to the requirements of SOLAS regulation II-1/8, ro-ro passenger ships shall comply, subject to the provisions of paragraph 2, if applicable, with the following:

- .1 the provisions of paragraph 2.3 of regulation 8 shall be complied with when taking into account the effect of a hypothetical volume of seawater which is assumed to have accumulated, subject to the provisions of paragraph 3, on the first deck above the designed waterline of the ro-ro cargo space or special category space as defined in SOLAS regulation II-2/3 assumed to be damaged (referred to as "the damaged ro-ro deck" hereinafter). The other requirements of regulation 8 need not be complied with in the application of these requirements. The volume of assumed accumulated seawater shall be kept the same at all trim and heeling angles, and shall be calculated with the following distribution density assuming that it were spread over the damaged ro-ro deck in the ship's upright position:

0.5 m³/m², if the residual freeboard (fr) is 0.3 m or less;

0.0 m³/m², if the residual freeboard (fr) is 2 m or more; and

intermediate values to be determined by linear interpolation, if the residual freeboard (fr) is 0.3 m or more but less than 2 m,

where the residual freeboard (fr) is the minimum distance between the damaged ro-ro deck and the final waterline at the location of the damage in the damage case being considered without taking into account the effect of the volume of assumed accumulated seawater on the damaged ro-ro deck;

- .2 when a high-efficiency drainage system is installed, the Administration may allow a reduction of the distribution density of the volume of assumed accumulated seawater in accordance with the guidelines developed by the Organization;¹⁵
- .3 for ships in geographically defined restricted areas of operation, the Administration may reduce the distribution density representing the volume of assumed accumulated seawater determined in accordance with subparagraph .1 substituting such distribution density by the following:
 - .3.1 0.0 m³/m², if the significant wave height (hs) defining the area concerned is 1.5 m or less;
 - .3.2 the value determined in accordance with subparagraph .1, if the significant wave height (hs) defining the area concerned is 4 m or above;

¹⁵ Refer to the guidelines to be developed by the Organization.

- .3.3 intermediate values to be determined by linear interpolation, if the significant wave height (hs) defining the area concerned is 1.5 m or more but less than 4 m;
- provided that the following conditions are fulfilled:
- .3.4 the Administration is satisfied that the defined area is represented by the significant wave height (hs) which is not exceeded with a probability of more than 10%; and
- .3.5 the area of operation and, if applicable, the part of the year for which a certain value of the significant wave height (hs) has been established are entered into the certificates;
- .4 as an alternative to the requirements of subparagraph .1 or subparagraph .3, the Administration may exempt application of the requirements of subparagraph .1 or subparagraph .3 and accept proof, established by model tests carried out for an individual ship in accordance with the model test method developed by the Organization,¹⁶ justifying that the ship will not capsize with the assumed extent of damage as provided in paragraph 4 of regulation 8 in the worst location being considered under paragraph 1.1 in an irregular seaway; and
- .5 the information supplied to the master in accordance with paragraphs 7.1 and 7.2 of regulation 8, as developed for compliance with paragraphs 2.3 to 2.3.4 thereof, shall apply unchanged to ro-ro passenger ships approved according to these requirements.

2 For assessing the effect of the volume of the assumed accumulated seawater on the damaged ro-ro deck in paragraph 1, the following provisions shall prevail:

- .1 a transverse or longitudinal bulkhead shall be considered intact if all parts of it lie inboard of vertical surfaces on both sides of the ship, which are situated at a distance from the shell plating equal to one-fifth of the breadth of the ship, as defined in regulation 2, and measured at right angles to the centreline at the level of the deepest subdivision load line;
- .2 in cases where the ship's hull is structurally partly widened for compliance with the provisions of this regulation, the resulting increase of the value of one-fifth of the breadth of it is to be used throughout, but shall not govern the location of existing bulkhead penetrations, piping systems, etc., which were acceptable prior to the widening;
- .3 the tightness of transverse or longitudinal bulkheads which are taken into account as effective to confine the assumed accumulated seawater in the compartment concerned on the damaged ro-ro deck shall be commensurate with the drainage system, and shall withstand hydrostatic pressure in accordance with the results of the damage calculation. Such bulkheads shall be at least 4 m in height;
- .4 for special arrangements like hanging decks and wide side casings, other bulkhead heights may be accepted based on detailed model tests;

¹⁶

Refer to the Model test method, given in the appendix.

- .5 in calculating the effect of the water on the damaged ro-ro deck, the volume and surface effect of the water shall be reduced by 10% to account for the permeability of the ro-ro space;
- .6 the effect of the volume of the assumed accumulated seawater need not be taken into account for any compartment on the damaged ro-ro deck, provided that such a compartment has on each side of the deck freeing ports evenly distributed along the sides of the compartment complying with the following:

$$.6.1 \quad A \geq 0.3 l$$

where: A is the total area of freeing ports on each side of the deck in m^2 ; and

l is the length of the compartment in m;

- .6.2 the ship shall maintain the residual freeboard of at least 1 m in the worst damage condition without taking into account the effect of the assumed volume of water on the damaged ro-ro deck;
- .6.3 such freeing ports shall be located within the height of 0.6 m above the damaged ro-ro deck, and the lower edge of the ports shall be within 2 cm above the damaged ro-ro deck; and
- .6.4 such freeing ports shall be fitted with closing devices or flaps to prevent water entering the ro-ro deck whilst allowing water, which may accumulate on the ro-ro deck, to drain; and
- .7 when a bulkhead above the ro-ro deck is assumed damaged, both compartments bordering the bulkhead shall be assumed to be flooded but the distribution density of seawater in such compartment may be determined by the following formula:

$$d = d_0 \cdot A_1 / (A_1 + A_2)$$

where: d_0 is the distribution density when assuming the bulkhead is undamaged, as determined in accordance with paragraph 1 of these requirements;

A_1 is the area of the larger compartment in m^2 ; and

A_2 is the area of the smaller compartment in m^2 .

- 3 For ships with centrecasings, any horizontal openings for passenger or vehicle access to the other side need not be closed and made watertight. The calculation of amount of water on deck should be made as if the centrecasing is watertight provided the opening is not greater than 5.5 m in width or the sum of all openings is not greater than 5.5 m in width. If the opening in the centrecasing is greater than 5.5 m in width then the calculation of amount of water on deck should be based upon the deck area on both sides of the centrecasing and with free flow of water between the two sides.

Appendix

MODEL TEST METHOD

1 Objectives

In the tests provided for in paragraph 1.4 of the stability requirements pertaining to the agreement, the ship should prove capability to withstand a seaway defined in paragraph 3 hereunder in the worst damage case scenario.

2 Ship model

2.1 The model should copy the actual ship for both outer configuration and internal arrangement - in particular of all damaged spaces, having an effect on the process of flooding and shipping of water. The damage should represent the worst damage case defined for compliance with paragraph 2.3.2 of SOLAS regulation II-1/8 (SOLAS 90). An additional test is required at a level keel midship damage, if the worst damage location according to SOLAS 90 is outside the range $\pm 10\%$ Lpp from the midship. This additional test is only required when the ro-ro spaces are assumed to be damaged.

2.2 The model should comply with the following:

- .1 length between perpendiculars (Lpp) is to be at least 3 m;
- .2 hull is to be thin enough in areas where this feature has influence on the results;
- .3 characteristics of motion should be modelled properly to the actual ship, paying particular attention to scaling of radii of gyration in roll and pitch motions. Draught, trim, heel and centre of gravity should represent the worst damage case;
- .4 main design features such as watertight bulkheads, air escapes etc., above and below the bulkhead deck that can result in asymmetric flooding should be modelled properly as far as practicable, to represent the real situation;
- .5 the shape of the damage opening shall be as follows:
 - .5.1 rectangular side profile with a width according to SOLAS regulation II-1/8.4.1 and unlimited vertical extent;
 - .5.2 isosceles triangular profile in the horizontal plane with a height equal to B/5 according to SOLAS regulation II-1/8.4.2.

3 Procedure for experiments

3.1 The model should be subjected to a long-crested irregular seaway defined by the JONSWAP spectrum with a significant wave height Hs, defined in paragraph 1.3 of the stability requirements and having peak enhancement factor γ and peak period Tp as follows:

- .1 $T_p = 4\sqrt{H_s}$ with $\gamma = 3.3$; and
- .2 T_p equal to the roll resonant period for the damaged ship without water on deck at the specified loading condition but not higher than $6\sqrt{H_s}$ and with $\gamma = 1$.

3.2 The model should be free to drift and placed in beam seas (90° heading) with the damage hole facing the oncoming waves. The model should not be restrained in a manner to resist capsize. If the ship is upright in flooded condition, 1° of heel towards the damage should be given.

3.3 At least 5 (five) experiments for each peak period should be carried out. The test period for each run shall be of a duration such that a stationary state has been reached but should be run for not less than 30 min in full-scale time. A different wave realization train should be used for each test.

3.4 If none of the experiments result in final inclination towards the damage, the experiments should be repeated with 5 runs at each of the two specified wave conditions or, alternatively, the model should be given an additional 1° angle of heel towards the damage and the experiment repeated with 2 runs at each of the two specified wave conditions. The purpose of these additional experiments is to demonstrate, in the best possible way, survival capability against capsizing in both directions.

3.5 The tests are to be carried out for the following damage cases:

- .1 the worst damage case with regard to the area under the GZ curve according to SOLAS; and
- .2 the worst midship damage case with regard to residual freeboard in the midship area if required by 2.1.

4 Survival criteria

4.1 The ship should be considered as surviving if a stationary state is reached for the successive test runs as required in 3.3 but subject to 4.2.

4.2 Angles of roll of more than 30° against the vertical axis, occurring more frequently than in 20% of the rolling cycles or steady heel greater than 20° should be taken as capsizing events even if a stationary state is reached.

5 Test approval

5.1 It is the responsibility of the Administration to approve the model test programme in advance. It should also be born in mind that lesser damages may provide a worst case scenario.

5.2 Test should be documented by means of a report and a video or other visual record containing all relevant information of the ship and test results. A copy of the video and report should be submitted to the Organization, together with the Administration's acceptance of the test.

BILAGA 5

INTERNATIONAL MARITIME ORGANIZATION

4 ALBERT EMBANKMENT,
LONDON SE1 7SR

Telephone: 071-735 7611
Telegrams: INTERMAR-LONDON SE1
Telex: 23588
Telefax: 071-587 3210

Ref.T2/6.05



COM/Circ.106
6 August 1991

TESTING OF MF DIGITAL SELECTIVE CALLING EQUIPMENT INSTALLED FOR DISTRESS AND SAFETY BY SHIPS AND COAST STATIONS

1 The CCIR, recognizing the need for a means of testing the MF DSC system without either initiating a commercial call or generating a false alarm, have introduced a special "test" call, which enables a safety category message to be generated by a vessel and acknowledged by a coast station.

2 The Sub-Committee on Radiocommunications at its thirty-seventh session (COM 37/17 paragraphs 3.38 and 3.39):

recognizing that many ship installations may not have been used since they were commissioned and ship and coast station operators would benefit from experience of operating procedures,

bearing in mind the provision of regulation N3068 of the ITU Radio Regulations which prescribes that "test transmissions shall be kept to a minimum" and "should be co-ordinated with a competent authority, as necessary", in order not to overload the distress channel, and

recommended that adjacent Administrations introduce a regular daily exchange of MF DSC "test/safety" messages between their coast stations and that ships, periodically exchange MF DSC test messages with their nearest coast station either prior to entering harbour or prior to departure.

3 Administrations are further advised that the publication of a list of coast stations equipped with MF DSC equipment, stating which stations can accept and reply to DSC test calls, would be helpful to shipmasters.

BILAGA 6

TELEFÖRVALTNINGSCENTRALEN

ANVISNINGAR FÖR TESTNING AV MF/DSC-UTRUSTNING

Ett fartyg kan prova hur dess MF/HF-DSC-utrustning fungerar:

- a) Genom att sända ett testanrop på nöd- och säkerhetsfrekvensen 2187,5 kHz till en station som använder DSC. I Finland till sjöradionumret 002301234.
- b) Genom att sända ett DSC-anrop på en "ofarlig" frekvens, där det inte finns någon DSC-passning. Därvid kan full bekräftelse inte fås på att DSC-anropet har rätt innehåll.
- c) Genom att sända ett rutinanrop till en kuststation, ett annat fartyg eller en sjöfartsläroanstalt, som använder DSC, antingen på den internationella anropsfrekvensen eller på en på förhand överenskommen trafikfrekvens.
- d) Genom att anropa Åbo sjöräddningscentral, som passar Finlands nationella frekvenspar samt det första internationella frekvensparet på 8 MHz.

Frekvenserna är:

Fartyg/sändning	MRCC Turku/sändning
2157,5 kHz	1622,5 kHz
8415,0 kHz	8436,5 kHz

Normal testning utförs på dessa frekvenser enligt följande:

anropsformat (format)	selective
MMSI	002300002
anropskategori (category)	routine
telecom 1	ship position.

Om man också önskar testa övergången till tal, skall man komma överens om det på förhand genom att ringa numret (921) 281 5803.

Nedan finns beskrivet hur de i punkterna a - d nämnda testen genomförs. Bifogat finns dessutom en förteckning över sjöradionumren till finländska fartyg och vissa europeiska kustradiostationer.

a) Provning på nöd- och säkerhetsfrekvensen

Om man på MF-DSC:s nöd- och säkerhetsfrekvens 2187,5 kHz vill testa möjligheten att få kontakt med en kustradiostation eller sjöräddningscentral, skall man göra på följande sätt:

- Typ av DSC-anrop (format specifier) = anrop till en station (individual call).
- Adress = sjöradionumret till den sjöräddningscentral eller kustradiostation till vilken kontakt prövas. Bifogat finns en förteckning över sjöradionumren till vissa kustradiostationer som passar 2187,5 kHz.
- Kategori = säkerhetsanrop (safety).
- Egen identifiering = det egna fartygets sjöradionummer.

- I den del av DSC-anropet som skall innehålla meddelandet väljs på det sätt som apparat tillverkaren beskrivit information att det är fråga om testning ("first telecommand" = "test 118").

Sjöräddningscentralen eller kustradiostationen svarar på testanropet med användning av DSC, vilket gör att man får svar på bildskärmen i sin egen DSC-apparat. Normalt förs ingen fortsatt trafik efter testningen.

I Finland kan testning utföras tillsammans med Helsinki Radio, Turku Radio, Åbo sjöräddningscentral eller sjöräddningsundercentralerna (Helsingfors, Vasa).

b) Prov på en "ofarlig" frekvens

Om man bara vill kontrollera att ett DSC-anrop går ut från sändaren, skall testet göras på en lämplig trafikkanal för radiotelextrafik. Lämpliga frekvenser är t.ex. följande:

2149,0 kHz
 4204,5 kHz
 6302,5 kHz
 8398,5 kHz
 12562,0 kHz
 16787,0 kHz
 18895,0 kHz
 22354,0 kHz
 25195,0 kHz.

Anropet skall adresseras till en särskild station (sjöradionumret 230230230 kan användas som adress) och som anropets kategori skall anges "rutin". Ett sådant anrop besvaras inte, och anropet föranleder ingen fortsatt trafik.

c) Ett rutinanrop till en kustradiostation eller till ett annat fartyg

DSC-rutinanrop kan när som helst sändas mellan ett fartyg och en kustradiostation eller mellan två fartyg.

I anropen mellan kustradiostationen och fartyget används de DSC-frekvenser för rutintrafik som passas av ifrågavarande kustradiostation.

Mellan fartyg kan DSC-rutinanrop sändas på de HF-telexfrekvenser som är avsedda för trafik mellan fartyg. Lämpliga HF-frekvenser är t.ex.:

4204,5 kHz
 6302,5 kHz
 8398,5 kHz
 12562,0 kHz
 16787,0 kHz
 18895,0 kHz
 22354,0 kHz
 25195,0 kHz.

I DSC-anrop mellan fartyg på MF-frekvenserna kan man använda den internationella DSC-frekvensen 2177,0 kHz.

d) Anrop till Åbo sjöräddningscentralens teststation

Radiostationen vid Åbo sjöräddningscentral börjar passa Finlands nationella MF-DSC-frekvenspar och tre internationella HF-DSC-frekvenspar. Stationen är avsedd för testning av fartygens DSC-utrustning.

De DSC-frekvenser som Åbo sjöräddningscentral använder är:

Fartygets sändningsfrekvens	Sjöräddningscentralens sändningsfrekvens
2157,5 kHz	1622,5 kHz
4208,0 kHz	4219,5 kHz
6312,5 kHz	6331,0 kHz
8415,0 kHz	8436,5 kHz.

Teststationen använder sjöradionumret 002300002.

Stationen passar automatiskt MF-DSC-frekvensparet 2157,5 / 1622,5 kHz.
Med teststationen skall på förhand överenskommas om användning av andra frekvenser.

Vid Åbo sjöräddningscentral finns även en INMARSAT-B satellitterminal, som kan kontaktas per:

- telefon 871 - 323000020
- fax 871 - 323000021
- telex 581 - 323000023
- data 1111 - 323000022 (9,6 KBIT).

BILAGA 7

INTERNATIONAL MARITIME ORGANIZATION

4 ALBERT EMBANKMENT
LONDON SE1 7SRTelephone: 0171-735 7611
Telegrams: INTERMAR-LONDON SE1
Telex: 23588
Telefax: 0171-587 3210COM/Circ.127
23 February 1995

Ref. T2/6.03

**GUIDELINES FOR AVOIDING FALSE
DISTRESS ALERTS**

1 The Sub-Committee on Radiocommunications, at its fortieth session (16 to 20 January 1995), prepared a draft Assembly resolution on guidelines for avoiding false distress alerts, given at annex. The guidelines are expected to be approved by the sixty-fifth session of the Maritime Safety Committee and submitted for adoption by the nineteenth Assembly.

2 In view of the urgency of reducing the number of false distress alerts now occurring, as outlined in the draft Assembly resolution, the Sub-Committee approved circulation of the guidance pending its adoption by the Assembly and invited the Maritime Safety Committee to endorse this decision.

3 Governments are invited to bring the guidance to the attention of all concerned.

ANNEX**DRAFT ASSEMBLY RESOLUTION ON GUIDELINES FOR
AVOIDING FALSE DISTRESS ALERTS**

THE ASSEMBLY,

RECALLING Article 15(j) of the Convention on the International Maritime Organization (IMO) concerning the functions of the Assembly in relation to regulations and guidelines concerning maritime safety and the prevention and control of marine pollution from ships,

CONSIDERING problems reported by Member Governments related to the proper operation of the GMDSS, in particular that false distress alerts are becoming a major problem to the efficient operation of search and rescue (SAR) services,

RECALLING that the GMDSS was developed on the basis of resolution 6 to the International Conference on Maritime Search and Rescue, 1979 and that according to that resolution, the GMDSS should provide, among other things, the essential radio elements of the international SAR plan,

NOTING that the excessive amount of false distress alerts creates a serious and unnecessary burden on Rescue Co-ordination Centres (RCCs), may have adverse effects on seafarers' confidence in the GMDSS and could also have potentially serious effects on real distress situations and the safety of life at sea,

BEING AWARE that, if a substantive reduction in the number of false distress alerts now occurring is not achieved in the near future, the quality and efficiency of SAR organizations might be jeopardized,

CONSIDERING that an urgent dissemination of some of the problems which have become evident to rescue service providers would help in the education of people and organizations involved and eventually contribute to a reduction in the number of false distress alerts,

CONSIDERING ALSO that Administrations, manufacturers, educators, users, communication and rescue service providers and all others concerned need guidance on ways and means of reducing false distress alerts,

HAVING CONSIDERED the recommendations made by the Maritime Safety Committee at its [sixty-fifth] session,

1. ADOPTS the Guidelines for Avoiding False Distress Alerts, set out in the annex to the present resolution;
2. URGES Governments to bring them to the attention of all concerned.

ANNEX**GUIDELINES FOR AVOIDING FALSE DISTRESS ALERTS****1 Administrations should:**

- .1 inform shipowners and seafarers about the implications of the rising number of false distress alerts;
- .2 make important provisions for ships to properly register all GMDSS equipment, and ensure that this registration data is readily available to RCCs;
- .3 consider establishing and using national violation enforcement measures to prosecute those who:
 - .3.1 inadvertently transmit a false distress alert without proper cancellation, or who fail to respond to a distress alert due to misuse or negligence;
 - .3.2 repeatedly transmit false distress alerts; and
 - .3.3 deliberately transmit false distress alerts;
- .4 use the International Telecommunication Union violation reporting process for false distress alerts, or for failure to respond to a distress alert relayed from shore-to-ship;
- .5 ensure that all relevant ship personnel know how GMDSS equipment operates, the importance of avoiding false distress alerts and the necessary steps to be taken to prevent transmitting false distress alerts and the procedures to be followed when a false distress alert has been transmitted;
- .6 inform type-approval authorities of false distress alert problems to draw their attention to testing and alerting functions of radio equipment during the type approval process;
- .7 urge companies installing radio equipment to train relevant ship personnel to ensure they are familiar with operation of the installed equipment;
- .8 investigate the cause when a specific model of GMDSS equipment repeatedly transmits unwanted distress alerts and inform appropriate organizations accordingly;
- .9 ensure that surveyors and inspectors are informed about GMDSS equipment, and particularly how to operate and test it without transmitting a false distress alert; and
- .10 require that GMDSS radio operators be appropriately certificated.

2 Manufacturers, suppliers and installers should:

- .1 design equipment for distress alerting so that:
 - .1.1 it will not be possible to transmit a distress alert unintentionally;
 - .1.2 the panel for emergency operation is separated from the one for normal operation and is partially fitted with a cover and the switches on the panel are clearly classified by colouring; and
 - .1.3 there are standardized arrangements of operation panels and operational procedures;
- .2 design test features so that the testing of GMDSS equipment will not result in transmitting false distress alerts;
- .3 ensure that any distress alert activation is indicated visually or acoustically, or both and shows that the equipment is transmitting a distress alert, until manually deactivated;
- .4 ensure that the satellite EPIRB position on board, installations (including the release and activation mechanisms) and handling procedures preclude unwanted activation (designing the EPIRB so that when it is out of its bracket it must also be immersed in water to activate automatically. When operated manually a two-step activation action is required);
- .5 provide clear and precise operational instructions that are easy to understand (maintenance and operational instructions should be separated, and should be delivered in English and any other language deemed necessary);
- .6 ensure that when any GMDSS equipment has been installed, necessary instructions are given to appropriate ship personnel, specifically pointing out the operational procedures (a record should be kept that such instructions have been given); and
- .7 ensure that supplier and installation personnel understand how the GMDSS works, and the consequences of transmitting a false distress alert.

3 Trainers and educators should:

- .1 ensure that maritime education centres are informed and teach about false distress alert problems and implications to SAR, the GMDSS, etc., and the procedures to be followed if a false distress alert is transmitted;
- .2 obtain and use actual case histories as examples when teaching;
- .3 emphasise the need to avoid false distress alerts in all maritime training and education; and
- .4 ensure that no inadvertent transmission of a false distress alert occurs when training on GMDSS equipment.

4 Companies, Masters and seafarers should, as appropriate:

- .1 ensure that all GMDSS certificated personnel responsible for sending a distress alert have been instructed and are competent to operate the particular radio equipment on the ship;
- .2 ensure that the person or persons responsible for communications during distress incidents give necessary instructions and information to all crew members who should know how to use GMDSS equipment to send a distress alert;
- .3 ensure that during each abandon ship drill instruction is given on how emergency equipment should be used to provide GMDSS functions;
- .4 ensure that GMDSS equipment testing is only undertaken under supervision of the person responsible for communications during distress incidents;
- .5 ensure that GMDSS equipment testing or drills are never allowed to cause false distress alerts;
- .6 ensure that encoded identities of satellite EPIRBs, which are used by SAR personnel responding to emergencies, are properly registered in a database accessible 24 hours per day or automatically provided to SAR authorities (masters should confirm that their EPIRBs have been registered with such a database to help SAR services identify the ship in the event of distress and rapidly obtain other information to help them respond appropriately);
- .7 ensure that EPIRB, INMARSAT and DSC registration data is immediately updated, if the ship's owner, name, flag or similar information changes, and, necessary action is taken to reprogramme the ships new data in the GMDSS equipment concerned;
- .8 ensure that, for new ships, positions for installing EPIRBs are considered at the earliest stage of ship design and construction;
- .9 ensure that satellite EPIRBs are carefully installed in accordance with manufacturers' instructions and using qualified personnel (sometimes satellite EPIRBs are damaged or broken due to improper handling or installation. They must be installed in a proper location to float-free and automatically activate if the ship sinks. Care must be taken that they are not tampered with or accidentally activated. If the coding must be changed or the batteries serviced, manufacturers' requirements must be strictly followed. There have been cases of attaching EPIRB lanyards to the ship so the EPIRB cannot float free; the lanyards are only to be used by survivors for securing the EPIRB to a survival craft or person in water.);

- .10 ensure that EPIRBs are not activated if assistance is already immediately available (EPIRBs are intended to call for assistance if the ship is unable to obtain help by other means, and to provide position information and homing signals for SAR units);
- .11 ensure that if a distress alert has been accidentally transmitted, the ship makes every reasonable attempt to communicate with the RCC by any means to cancel the false distress alert using the procedures given in the appendix;
- .12 ensure that, if possible, after emergency use, the EPIRB is retrieved and deactivated; and
- .13 ensure that when an EPIRB is damaged and needs to be disposed of, or if a ship is sold for scrap or for any other reason a satellite EPIRB will no longer be used, the satellite EPIRB is made inoperable by either removing its battery and if possible returning it to the manufacturer or by demolishing it.

Note: If the EPIRB is returned to the manufacturer it should be wrapped in tin foil to prevent transmission of signals during shipment.

Appendix

INSTRUCTIONS FOR MARINERS AND OTHERS** FOR CANCELLING A FALSE DISTRESS ALERT

DSC

1 VHF

- .1 switch off transmitter immediately*
- .2 switch equipment on and set to Channel 16
- .3 make broadcast to "All Stations" giving name of vessel, callsign and DSC number, and cancel the false distress alert.

Example

All Stations, All Stations, All Stations
This is NAME, CALLSIGN,
DSC NUMBER, POSITION.

Cancel my distress alert of
DATE, TIME, UTC.
= Master, NAME, CALLSIGN,
DSC NUMBER, DATE, TIME UTC.

2 MF

- .1 switch off equipment immediately*
- .2 switch equipment on and tune for radiotelephony transmission on 2,182 kHz

make broadcast to "All Stations" giving the vessel's name, callsign and DSC number, and cancel the false distress alert.

* This applies when the false alert is detected during transmission.

** Appropriate signals should precede these messages in accordance with the ITU Radio Regulations chapter NIX.

Example

All Stations, All Stations, All Stations
This is NAME, CALLSIGN,
DSC NUMBER, POSITION.

Cancel my distress alert of
DATE, TIME, UTC.
= Master NAME, CALLSIGN.
DSC NUMBER, DATE, TIME UTC.

3 HF

As for MF but the alert must be cancelled on all the frequency bands on which it was transmitted. Hence, in stage 2.2 the transmitter should be tuned consecutively to the radiotelephony distress frequencies in the 4, 6, 8, 12 and 16 MHz bands, as necessary.

INMARSAT-C

4 Notify the appropriate RCC to cancel the alert by sending a distress priority message via the same CES through which the false distress alert was sent.

Example of message

NAME, CALLSIGN, IDENTITY NUMBER,
POSITION,
Cancel my INMARSAT-C distress
alert of DATE, TIME, UTC
= Master +

EPIRBs

5 If, for any reason, an EPIRB is activated accidentally, the ship should contact the nearest coast station or an appropriate coast earth station or RCC and cancel the distress alert.

General

6 Notwithstanding the above, a ship may use any means available to them to inform the appropriate authorities that a false distress alert has been transmitted and should be cancelled.

7 No action will normally be taken against any ship or mariner for reporting and cancelling a false distress alert. However, in view of the serious consequences of false alerts, and the strict ban on their transmission, Governments may prosecute in cases of repeated violations.

BILAGA 8

Förteckning över sjöradionumren till vissa kustradiostationer som passar frekvensen
2187,5 kHz

Finland	Åbo sjöräddningscentral Helsingfors sjöräddningsundercentral Vasa sjöräddningsundercentral Turku Radio Helsinki Radio	00 230 1234 00 230 0020
Danmark	Lyngby Radio Blaavand Radio	00 219 1000 00 219 2000
Sverige	Göteborg Radio Stockholm Radio	00 265 1000 00 265 2000
Norge	Tjöme Radio Farsund Radio Rogaland Radio Bergen Radio Florö Radio Orlandet Radio Bodö Radio	00 257 0100 00 257 0200 00 257 0300 00 257 0400 00 257 0500 00 257 0600 00 257 0700
Tyskland	Norddeich Radio Rügen Radio	00 211 4200 00 211 4500
Belgien	Oostende Radio	00 205 0480
Holland	Netherlands Coast Guard	00 244 2000
Storbritannien	Falmouth MRCC Milford Haven MRSC Holyhead MRSC Clyde MRSC Stornoway MRSC Shetland MRSC Aberdeen MRCC Tyne/Tees MRSC Humber MRSC	00 232 0014 00 232 0017 00 232 0018 00 232 0022 00 232 0024 00 232 0001 00 232 0004 00 232 0006 00 232 0007
Irland	Malin Head Radio Valentia Radio	00 250 0100 00 250 0200

BILAGA 9

Finländska fartygs sjöradionummer 18.6.1996

(Förteckningen upptar fartyg för vilka sjöradionummer reserverats fastän de saknar DSC-utrustning.)

Abonnentnummer	Fartygets namn	Anrop	Telex
230101000	Tebo Olympia	OINM	
230102000	Outokumpu	OITG	
230103660	Fanny	OIEM	
230103670	Mariana	OF-2576	
230104000	Kontula	OIKF	14115
230105710	Kiisla	OIUL	
230105740	Lokki	OGOU	
230105750	Kurki	OIUZ	
230105760	Kajava	OIUJ	
230105770	Kihu	OIUK	
230105850	Tiira	OIUH	
230105870	RV 137	OGOM	
230105880	RV 142	OGOV	
230105890	RV 126	OGNX	
230105910	RV 125	OGNW	
230105940	RV 136	OGOL	
230105950	RV 135	OGOK	
230105960	RV 123	OGNU	
230105970	RV 124	OGNV	
230105980	RV 133	OGOI	
230105990	PV 124	OIUV	
230106000	Oihonna	OISE	14122
230106040	PV 114	OIUN	
230106060	PV 117	OI-7998	
230106070	PV 108	OIUB	
230106080	PV 121	OIUU	
230106090	PV 112	OIUF	
230106110	PV 104	OGOX	
230106140	PV 119	OI-8000	
230106150	PV 120	OIUR	
230106160	IA 101	OJED	
230106180	RV 243	OGOW	
230106190	RV 241	OGOQ	
230106210	RV 238	OGON	
230106250	RV 214	OGNL	
230106260	RV 222	OGNT	
230106270	RV 220	OGNR	
230106280	RV 221	OGNS	
230106290	RV 213	OGNK	
230106310	RV 215	OGNM	
230106340	PV 217	OIUO	
230106350	PV 209	OIUC	
230106360	PV 211	OIUE	
230106370	PV 210	OIUD	
230106380	PV 205	OGOY	
230106390	PV 225	OIUX	

Abonnentnummer	Fartygets namn	Anrop	Telex
230106410	PV 218	OIUS	
230106440	PV 222	OIUW	
230106460	PV 220	OI-7974	
230106470	PV 216	OI-7972	
230106480	PV 214	OI-7975	
230106490	PV 212	OJEA	
230106550	AV 244	OI-7981	
230106570	RV-301	OGOC	
230106580	PV-313	OIUG	
230106590	RV-340	OGOP	
230106610	PV-315	OIUP	
230106640	RV-332	OGOH	
230106650	PV-303	OGOT	
230106660	RV-331	OGOG	
230106670	RV-330	OGOF	
230106680	PV-323	OIUY	
230106690	PV-321	OI-7966	
230106750	RV-334	OGOJ	
230106760	PV-319	OIUT	
230106780	PV-316	OIUQ	
230106810	PV-306	OGOZ	
230106840	RV-339	OGOO	
230106850	PV-307	OIUA	
230106860	IA 303	OI-9324	
230106870	IA 304	OI-9323	
230107000	Envik	OIQS	
230107340	Tiina V	OI-4073	
230107660	Mio	OI-5270	
230107680	Wanda	OI-7019	
230107770	Katrilli	OI-3319	
230107910	Marita	OI-8348	
230108000	Kemira	OINR	14057
230108010	RV 216	OGNN	
230108040	AV 218	OI-7976	
230108060	AV-210	OI-9189	
230108070	AV-211	OI-9190	
230108080	AV-212	OI-9192	
230108090	AV 216	OI-7982	
230108160	Sea-Gull I	OI-8736	
230108270	Valborg	OFNR	
230108280	Otto Malm	OI-9405	
230108290	Tuulie	OF-8135	
230108340	Heavy-Lady	OI-6806	
230109000	Finnsailor	OIVK	14134
230110000	Antares	OIWI	
230111000	Sirri	OINS	
230112000	Arkadia	OIQD	14113
230113000	Silja Festival	OISZ	14133
230114000	Palva	OITS	14093
230115000	Tervi	OITR	14090
230116000	Kihu	OISL	14125
230117000	Tavi	OISM	14127

Abonnentnummer	Fartygets namn	Anrop	Telex
230118000	Lunni	OIHM	14095
230119000	Sotka	OIHN	14096
230121000	Tiira	OIHO	14097
230122000	Uikku	OIHQ	14098
230124000	Melkki	OIQU	14112
230126000	Vikla	OIOE	14075
230132000	Kristina Regina	OGBF	
230133000	Finnfellow	OIBS	
230134000	Degerö	OISX	
230135000	Svanö	OIPJ	
230136000	Borden	OIIE	
230137000	Turku Hill	OITN	14138
230139000	Mesto	OIEI	14086, 14130
230141000	Gunilla	OGXX	
230142000	Finnmerchant	OIPZ	14087
230143000	Norden	OIGN	14034
230145000	Aranda	OIRY	
230148000	Bore Britannica	OIZE	14140
230149000	Camilla	OIPP	
230150000	Fennia	OGRJ	
230151000	Alandia	OIJJ	
230157000	Norqueen	OIKQ	14060 (ex Bore Queen)
230158000	Cinderella	OIZS	
230159000	Isabella	OIZD	
230161000	Najaden	OIZB	
230162000	Winden	OIZC	
230163000	Trenden	OIZF	
230164000	Linda	OIXT	
230165000	Sofia	OIZK	
230166000	Aila	OIZL	
230167000	Finnjet	OIHH	14036
230169000	Norking	OIKP	14059 (ex Bore King)
230172000	Amorella	OIWS	
230176000	Roslagen	OIAP	
230178000	Aulis	OIOH	
230180000	Rosella	OIKR	
230181000	Mariella	OITI	14128
230182000	Kari	OIOG	
230183000	Astrea	OJCU	
230184000	Silja Serenade	OJCS	
230185000	Mimer	OIZX	(ex Bore Star)
230186000	Bore Sea	OIZZ	
230188000	Bore Nordia	OIZY	
230189000	Hamnö	OJCW	
230190000	Birka Princess	OITY	
230191000	Link Star	OIXX	
230192000	Merikotka	OJFL	14149
230193000	Finnfighter	OJGY	
230194000	Hesperia	OJCZ	
230196000	Katarina	OHLV	
230197000	Kristina Brahe	OIEC	
230201000	Herakles	OGTC	

Abonnentnummer	Fartygets namn	Anrop	Telex
230202000	Steel	OIVR	
230203000	Cassandra	OITK	
230204000	Granö	OJDA	
230205000	Miniforest	OIKC	
230206000	Bona Fe	OIIT	
230207000	Marika	OIKD	
230208000	Smaragden	OJDB	
230209000	Passaden	OJDC	
230210000	Klenoden	OJDD	
230211000	Christina	OJDK	
230212000	Tankos	OITW	
230213000	Ann-Mari	OJCQ	
230215000	Radisson Diamond	OJDO	14148
230216000	Mini Star	OIXW	
230217000	Ahtela	OJDL	
230218000	Mastera	OJDR	14146
230219000	Petsamo	OIZH	
230220000	Jenolin	OJDU	
230221000	Julia	OJDV	
230223000	Wasa Queen	OJDZ	
230225000	Helena	OJDX	
230226000	Styrsö	OJDM	
230227000	Lagard	OIWT	
230228000	Hermes	OIHB	
230229000	Dox	OIXV	
230232000	Raahen Fiiä	OI-2708	
230234000	Telepaatti	OF-3100	
230236000	Westgard	OINB	
230237000	Majgard	OING	
230238000	Anette	OISP	
230242000	Futura	OJDJ	
230245000	Fennica	OJAD	14153
230246000	Natura	OJDY	14154
230247000	Finnmaster	OJFH	
230248000	Finnhansa	OJFG	14156
230249000	Silja Europa	OJFN	
230251000	Kontio	OIRV	14136
230252000	Otso	OIRT	14132
230255000	Marnav	OGPF	14085
230258000	Pooki	OIHP	14137
230259000	Lillgaard	OIWU	
230262000	Garden	OIIIF	14162
230263000	Tower Julie	OJCY	
230268000	AT Marine	OIYE	14163
230269000	Doris	OJDS	
230270000	Helen	OJFP	
230272000	Sydgard	OJFX	
230274000	Mega	OIEV	
230275000	Nordica	OJAE	14170
230276000	Kraft	OIHG	
230277000	Linden	OJFU	
230279000	Neptun	OIKS	

Abonnentnummer	Fartygets namn	Anrop	Telex
230281000	Protector	OGPT	
230282000	Porin Karhu	OIHF	
230283000	Fram	OITV	
230284000	Finnmaid	OJFZ	
230285000	Bore Song	OJGA	14173
230286000	Esko	OIOI	
230289000	Sisu	OHMW	14038
230290000	Urho	OHMS	14022
230291000	Voima	OHLW	14051
230293000	Railship I	OJGC	14174
230296000	Jakobstads Wapen	OJGG	
230298000	Muikku	OHMM	
230300000	Valpas	OGOD	
230301000	Turva	OGOE	
230302000	Merikarhu	OJEG	
230303000	Tursas	OIUI	
230304000	Uisko	OIUM	
230305000	Finnpine	OJGM	
230306000	Finnpartner	OJGE	
230307000	Fjordstein	OJGL	
230308000	Östgard	OJGH	
230310000	AES	OJGJ	
230313000	Hanse	OHMN	
230315000	Bravaden	OJGQ	
230316000	Ajax	OF-2525	
230318000	Aura 3	OGWE	
230319000	Pohjanmaa	OIMD	
230321000	Anne	OJGS	
230322000	Apollo	OJGU	
230323000	Hocus Pocus	OJGV	
230324000	Tradewind	OJFW	
230325000	Vekara	OITM	
230327000	Ossi Barck	OIPO	
230328000	Raju	OIQH	
230329000	Finntrader	OJGF	
230331000	Kaipaa	OGXC	
230336000	Pasila	OJGT	
230339000	Zeus	OJHB	
230341000	Fjärdvägen	OJHC	
230344000	Transgard	OJHE	14181

MERENKULKULAITOKSEN KARTTAPAINO
HELSINKI 1996